

539,947

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number  
**WO 2004/015246 A1**

(51) International Patent Classification<sup>7</sup>: **F01L 7/02**,  
7/16, 1/34, 1/352, 1/356

(21) International Application Number:  
PCT/GB2003/003517

(22) International Filing Date: 12 August 2003 (12.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0218674.0 12 August 2002 (12.08.2002) GB

(71) Applicant and

(72) Inventor: **BOULTON, Andrew, J.** [GB/GB]; Gainsborough Park, Glentham Road, Gainsborough, Lincolnshire DN21 1SA (GB).

(74) Agent: **MURGITROYD & COMPANY**; Scotland House, 165-169 Scotland Street, Glasgow G5 8PL (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IMPROVEMENTS IN OR RELATING TO INTERNAL COMBUSTION ENGINES

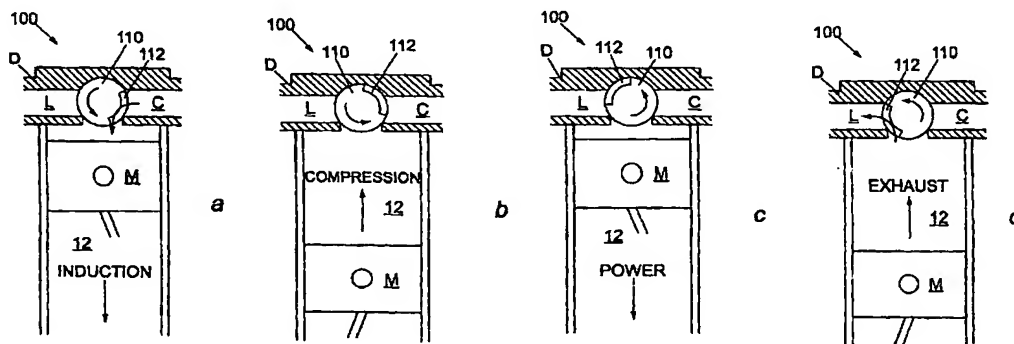

(57) Abstract: Cylinder head apparatus (100) for an internal combustion engine having a cylinder (F) and piston (M) comprises a rotating shaft (110) having a recess (112) causing periodic communication between the cylinder (F) and intake (C) and exhaust (L) passages. In other embodiments, two shafts are used, and hollow shafts with apertures are used.

WO 2004/015246 A1

1     Improvements in or Relating to Internal Combustion  
2     Engines

3

4     This invention relates to improvements in or  
5     relating to internal combustion engines, and in  
6     particular, but not exclusively, to improvements  
7     relating to replacement apparatus for the intake and  
8     exhaust valves of internal combustion engines.

9

10    Conventional four stroke internal combustion engines  
11    involve a four stage cycle. Firstly, there is an  
12    intake of air/fuel mixture into a cylinder; known as  
13    "intake stroke". Secondly, a piston within the  
14    cylinder compresses the air/fuel mixture; known as  
15    "compression stroke". Thirdly, the compressed  
16    air/fuel mixture is ignited in the cylinder causing  
17    combustion; known as "combustion stroke". And  
18    lastly, the combusted gases are exhausted; known as  
19    "exhaust stroke".

20

21    A four stroke internal combustion engine comprises  
22    an intake valve to allow an ingress of air/fuel

1 mixture into a cylinder, and an exhaust valve, to  
2 allow an egress of exhausted gases after combustion  
3 of the air/fuel mixture.

4

5 The timing of the opening and closing of the valves  
6 is vital to an engines performance.

7

8 To allow the piston to draw-in the fuel/air mixture  
9 (or air alone in the case of a direct injection  
10 engine), the intake valve needs to open as the  
11 piston moves from an extended position to a  
12 retracted position on the intake stroke.

13

14 The exhaust valve needs to be opened as the piston  
15 is extended in the exhaust stroke.

16

17 Both the intake and the exhaust valves each comprise  
18 a rocker arm and a valve return spring, with the  
19 rocker arm being actuated by a cam or a lobe located  
20 on a camshaft.

21

22 The valves act against the valve return springs,  
23 where the valves are fired in one direction, only  
24 then to stop at the extent of their travel, and be  
25 sent flying in the opposite direction. This happens  
26 many times a minute which wastefully drains power  
27 from the engine. This also causes noise, vibration  
28 and harshness.

29

30 As the camshaft rotates, the shape of the cam which  
31 actuates the rocker arm, determines the timing of  
32 the opening and closing of the intake and exhaust

1 valves.

2

3 Conventional designs of cams, particularly fixed  
4 cams, will only operate optimally over a limited  
5 range of speeds.

6

7 According to one aspect of the present invention, a  
8 cylinder head assembly comprises a cylinder head  
9 having an inlet passage and an outlet passage for  
10 communication, in use, with a cylinder, and at least  
11 one rotatably mounted shaft member interposed  
12 between the inlet and outlet passages and the  
13 cylinder, the shaft member(s) having passage means  
14 to allow an ingress of air mixture from the inlet  
15 passage to the cylinder at a first desired  
16 rotational position, and to allow an egress of  
17 combusted gases from the cylinder through the outlet  
18 passage at a second desired rotational position and  
19 to prevent the air or combusted gases from entering  
20 or exiting the cylinder at a third desired  
21 rotational position.

22

23 There may be two shaft members, one cooperating with  
24 the inlet passage and one with the outlet passage.

25

26 Preferably, the shaft members are coupled, in use,  
27 to a crankshaft with means for independently  
28 controlling or adjusting the speed of rotation of  
29 said shaft members.

30

31 Alternatively, the shaft members are driven  
32 independently of the crankshaft, and of each other,

1 with means for individually controlling or adjusting  
2 the speed of rotation of said shaft members.

3

4 The shaft member or each shaft member may be  
5 substantially solid, and the passage means may  
6 comprise a recess in the shaft member or a  
7 respective recess in each of the shaft members.

8

9 Alternatively, each shaft member may be hollow; each  
10 shaft member having at least one aperture located  
11 around a portion of its circumference, wherein the  
12 inlet shaft member allows an ingress of air/fuel  
13 mixture through the inlet shaft member to enter said  
14 cylinder when the aperture in the inlet shaft is  
15 presented to the cylinder, and the outlet shaft  
16 member allows an egress of combusted gases to exit  
17 the cylinder when the aperture in the outlet shaft  
18 member is presented to the cylinder.

19

20 Preferably each shaft member is provided with an  
21 inner hollow tube member rotatably mounted within  
22 said shaft member; each inner tube member having at  
23 least one aperture located around a portion of its  
24 circumference; rotation of said inner tube member  
25 within the respective hollow shaft members providing  
26 a variable size effective aperture, which allows a  
27 variable ingress of combustion air to enter said  
28 cylinder through the effective aperture in the inlet  
29 shaft member, and allows a variable egress of  
30 combusted gases from the cylinder to exit through  
31 the effective aperture in the outlet shaft member.

1 Preferably also, the speed of rotation of the inner  
2 and outer tube members are such that the effective  
3 aperture maximises or restricts the rate of ingress  
4 of air, or egress of exhaust gases, through the  
5 respective inner tube members.

6  
7 The inner tube members may be coupled, in use, to a  
8 crankshaft with means for independently controlling  
9 or adjusting the speed of rotation of said tube  
10 members. Alternatively, the tube members may be  
11 driven independently of the crankshaft, and of each  
12 other, with means for individually controlling or  
13 adjusting the speed of rotation of said tube  
14 members.

15  
16 Typically, the cylinder head assembly will form part  
17 of a multi-cylinder engine with the shaft member(s)  
18 extending over a number of cylinders, the shaft  
19 member(s) having a corresponding number of passage  
20 means.

21  
22 The shaft member(s) suitably have gas tight seal  
23 assemblies.

24  
25 From another aspect, the invention provides a method  
26 of allowing an ingress and egress of combustion air  
27 and combusted gases from a cylinder comprising the  
28 steps of:

29 presenting a passage means within a shaft  
30 member to an inlet passage;

31 retracting of a piston within a cylinder to  
32 allow an induction of air from the inlet passage

1 through said passage means into the cylinder;  
2 rotating the shaft member to prevent any  
3 leakage of air upon a compression of the air in the  
4 cylinder by the piston;  
5 combusting air/fuel mixture in the cylinder to  
6 cause said piston to retract;  
7 extending the piston in the cylinder;  
8 presenting passage means to the cylinder and  
9 an outlet passage to allow an egress of combusted  
10 gases; and  
11 repeating the above steps.

12  
13 In one form of the method, the same passage means is  
14 used for induction and egress.

15  
16 The passage means may be formed by an aperture in at  
17 least one hollow shaft, and the method further  
18 includes the step of varying the effective size of  
19 the aperture to restrict or maximise the amount of  
20 fluid flow through the aperture.

21  
22 Embodiments of the present invention will now be  
23 described, by way of example only, with reference to  
24 the accompanying drawings in which:-

25  
26 Fig. 1 is a schematic front sectional view of a  
27 conventional four stroke internal combustion  
28 engine;

29  
30 Figs. 2a-d are schematic front sectional views  
31 illustrating the workings of a single rotatably  
32 mounted shaft member of the present invention;

1 Figs. 3a-d are schematic front sectional views  
2 illustrating the workings of an alternative  
3 embodiment with two rotatably mounted shaft  
4 members;

5  
6 Figs. 4a and 4b are a side view and perspective  
7 side view respectively (shown schematically) of  
8 an alternative shaft member;

9  
10 Fig. 5 is a schematic plan view of further  
11 alternative shaft members;

12  
13 Fig. 6 is a schematic plan view of shaft member  
14 embodiments applied to more than one cylinder;

15  
16 Fig. 7 is a schematic perspective view of  
17 apparatus of a first embodiment;

18  
19 Fig. 8 is a schematic perspective view of  
20 apparatus of a second embodiment; and

21  
22 Fig. 9 is a schematic perspective view of  
23 apparatus of a third and fourth embodiment;

24  
25 With reference to the drawings, and in particular  
26 Fig. 1, there is shown conventional apparatus of a  
27 four stroke internal combustion engine 10.

28  
29 The conventional engine 10 comprises the known  
30 element of a cylinder 12 which houses a piston M  
31 which is movably sealed therein.

32



1 The piston M is attached to a crankshaft P by a  
2 connecting rod N and rod bearing O. The crankshaft  
3 P serves to convert the up and down motion of the  
4 piston M into rotational motion; which is utilised  
5 to turn wheels of a vehicle, propellers of a vessel  
6 or aircraft.

7  
8 The conventional engine 10 also comprises the known  
9 element of a cylinder head D having an intake valve  
10 assembly A and an exhaust valve assembly J which are  
11 both intermittently actuated by a camshaft I.  
12 Both valve assemblies A, J have rocker arms 14, 18  
13 with corresponding springs 16, 20, and conventional  
14 poppet valves 22, 24.

15  
16 On the intake stroke of a four stroke engine 10, the  
17 intake valve assembly A is open to allow an ingress  
18 of air/fuel mixture into the cylinder 12 via an  
19 intake port C.

20  
21 Meanwhile, the exhaust valve assembly J is closed.  
22 The piston M will retract drawing the air/fuel  
23 mixture into the cylinder 12.

24  
25 The piston M retracts by virtue of stored energy  
26 being transferred from a flywheel (not shown) to the  
27 piston M via the crankshaft P.

28  
29 It should be understood that on all "non-power  
30 strokes", namely, retraction of the piston M on the  
31 intake stroke, compression of the air/fuel mixture,  
32 and exhausting of the combusted gases, the energy

1 required to drive the piston M is transferred from  
2 the flywheel to the connected crankshaft P.

3

4 As the piston M bottoms out it will change direction  
5 and extend within the cylinder 12. Closure of the  
6 intake valve assembly A allows for the air/fuel  
7 mixture to be compressed within the cylinder 12;  
8 referred to as "compression stroke".

9

10 Again, the exhaust valve assembly J is closed.

11

12 When fully compressed, a spark plug K extending into  
13 the cylinder 12, ignites the compressed mixture to  
14 cause combustion.

15

16 Alternatively, in a diesel engine, the heat caused  
17 by compressing the air/fuel mixture alone will  
18 result in combustion.

19

20 The resultant combustion produces an excess of gases  
21 which force the piston M to retract within the  
22 cylinder 12.

23

24 The exhaust valve assembly J is opened as the piston  
25 M bottoms out to allow an egress of the combusted  
26 gases through an exhaust port L; referred to as  
27 "exhaust stroke".

28

29 As the piston M returns to an extended position, the  
30 exhaust valve assembly J is closed, whereas the  
31 intake valve assembly A is open to start the cycle  
32 again and allow in ingress of air/fuel mixture.

1 It will be realised that the timing of the opening  
2 and closing of the valve assemblies A, J will have a  
3 large bearing on the performance of the engine 10.  
4 If either of the valve assemblies A, J are open on  
5 the compression stroke, then the air/fuel mixture  
6 will not be fully compressed resulting in poor  
7 performance of the engine 10.

8  
9 Lobes or cams 26 located on the camshaft I are  
10 designed to intermittently open and close each of  
11 the valve assemblies A, J as and when required.

12  
13 It will be realised however, that (fixed) cams 26 of  
14 a particular design operate optimally for a given  
15 range of speeds only.

16  
17 The rocker arms 14, 18 act against the corresponding  
18 valves 22, 24 and valve return springs 16, 20. The  
19 valves 22, 24 are fired in one direction, only then  
20 to stop at the extent of their travel, and be sent  
21 flying in the opposite direction. This happens many  
22 times a minute which wastefully drains power from  
23 the engine 10 and can cause noise, vibration and  
24 harshness.

25  
26 In a first embodiment of the present invention, as  
27 illustrated in Figs. 2a-d and Fig. 7, there is  
28 provided apparatus 100 in the form of a cylinder  
29 head assembly comprising a cylinder head D adapted  
30 with a valve assembly replacement shaft member 110  
31 rotatably mounted.

32

1 The shaft member 110 is of the form of a cylindrical  
2 rod with a recess 112 removed around a portion of  
3 the circumference of the shaft member 110 and along  
4 that part of its length which is presented to  
5 (above) the cylinder 12.

6  
7 It is to be understood that the shaft member 110 and  
8 recess 112 are presented facing the cylinder  
9 irrespective of the cylinder's orientation; for  
10 example, it may be a horizontal engine, in which  
11 case the recess 112 is presented adjacently facing  
12 the cylinder 12.

13  
14 The shaft member 110 is rotatably mounted in the  
15 cylinder head D.

16  
17 The shaft member 110 is parallel with, and is co-  
18 operatively driven by, the crankshaft P by virtue of  
19 connecting means (not shown) in the form of a belt  
20 or gearing 114.

21  
22 The recess 112 serves to allow an ingress or egress  
23 of air/fuel mixture or exhaust gases to and from the  
24 cylinder 12 upon rotation of the shaft member 110.

25  
26 The depth and length of the recess 112 presented to  
27 (above) the cylinder 12 can be of any design and  
28 dimensions to allow optimum ingress and/or egress of  
29 air/fuel mixture and/or combusted gases to and from  
30 the cylinder 12; for example, the recess 112 may be  
31 of uniform depth and length or may have varying

1 depths or lengths, or the recess 112 may also be of  
2 the form of a helix, etc.

3  
4 In operation, as shown in Fig. 2a and Fig. 7, there  
5 is an inlet of air from an inlet manifold 116 which  
6 is coupled to a carburettor/fuel injector (not  
7 shown) to form an air/fuel mixture.

8  
9 The shaft member 110 is presented such that the  
10 recess 112 faces the intake port C and the cylinder  
11 12 to allow an ingress of air/fuel mixture.

12  
13 Rotation of the crankshaft P, initially caused by a  
14 starter motor (not shown) then subsequently by the  
15 transfer of energy from the flywheel, causes contra-  
16 rotation of the shaft member 110 by virtue of  
17 contra-connecting means (not shown) being connected  
18 to the crankshaft P and gearing 114 on the shaft  
19 member 110.

20  
21 Rotation of the crankshaft P will cause the piston M  
22 to retract, drawing-in the air/fuel mixture through  
23 the inlet port C, into the cylinder 12.

24  
25 Meanwhile, as the piston M is retracted by virtue of  
26 the rotating crankshaft P, the recess 112 of the  
27 shaft member 110 will contra-rotate in unison.

28  
29 As the piston M bottoms out, the rotating shaft  
30 member 110 and recess 112 face the intake port C and  
31 the cylinder head D. Thus preventing any ingress or

1 leakage of air/fuel mixture on the compression  
2 stroke, as shown in Fig. 2b.

3

4 On the compression stroke, the piston M is extended  
5 to compress the air/fuel mixture as the crankshaft P  
6 and interconnected shaft member 110 similarly  
7 rotate, as shown in Fig. 2c.

8

9 The recess 112 faces the cylinder head D and the  
10 exhaust port L.

11

12 A spark plug K (not shown for convenience in Figs.  
13 2a-d), ignites the compressed air/fuel mixture in  
14 the cylinder 12.

15

16 Alternatively, in a diesel engine, the heat caused  
17 by compressing the air/fuel mixture alone will  
18 result in combusted gases.

19

20 The resultant combustion causes the piston M to be  
21 fired to a retracted position causing the crankshaft  
22 P and shaft member 110 to rotate.

23

24 The recess 112 meanwhile, will rotate facing both  
25 the exhaust port L and cylinder 12 to allow the  
26 piston M to extend exhausting the combusted gases  
27 out through the recess 112 into the exhaust port L.

28

29 Upon exhaustion of the combusted gases, rotation of  
30 the crankshaft P will cause the recess 112 to rotate  
31 and face the cylinder 12 and inlet port C to allow  
32 the cycle to begin again.

1 As the rotation of the crankshaft P and shaft member  
2 112 are rotating opposite to one another, this will  
3 have a balancing effect which may reduce noise and  
4 vibration of the engine 10.

5  
6 To prevent any unburnt fuel being expelled with the  
7 exhaust gases, fuel injectors (not shown) may be  
8 used to control the flow of fuel into the separate  
9 branches of the inlet manifold. The fuel injectors  
10 would be closed before the recess 112 closes, such  
11 that no unburnt fuel would be exhausted by being  
12 trapped in the recess 112 as the shaft 110 rotates.  
13 Alternatively, the fuel injectors may directly  
14 inject the fuel into the cylinder 12. Hence, only  
15 air would therefore pass through the manifold, via  
16 the recess 112 into the cylinder 12, avoiding  
17 unburnt fuel being trapped in the recess 112, and  
18 being exhausted as the shaft 110 rotates.

19  
20 In a second embodiment of the present invention, as  
21 shown in Figs. 3a-d and Fig. 8, there is provided  
22 apparatus 200 in the form of a cylinder head  
23 assembly comprising a cylinder head D having two  
24 valve assembly replacement shaft members, namely, an  
25 intake shaft member 210 and an exhaust shaft member  
26 212 which are rotatably mounted.

27  
28 The shaft members 210, 212 are of the form as  
29 described above with recesses 214, 216 as also  
30 described above.

31

1 The shaft members 210, 212 are rotatably mounted in  
2 the cylinder head D as before.

3

4 The shaft members 210, 212 are parallel with, and  
5 are co-operatively driven by, the crankshaft P by  
6 connecting means (not shown) coupled to gearing 114.

7

8 Alternatively, the shaft may be belt driven from the  
9 crankshaft P.

10

11 The recesses 214, 216 are as described above, and  
12 serve to allow an ingress of air/fuel mixture and an  
13 egress of combusted gases respectively, into the  
14 cylinder 12 upon rotation of the crankshaft P and  
15 shaft members 210, 212.

16

17 The depth and length of the recesses 214, 216  
18 presented to (above) the cylinder 12 can be of any  
19 design and dimensions to allow optimum ingress and  
20 egress of air/fuel mixture and combusted gases to  
21 and from the cylinder 12; for example, the recesses  
22 214, 216 may be of uniform depth and length or may  
23 have varying depths or lengths, or they may be of  
24 the form of a helix, etc.

25

26 In operation, as shown in Fig. 3a, the intake shaft  
27 member 210 is rotated, by the crankshaft P, to face  
28 the intake port C and the cylinder 12 to allow an  
29 ingress of air/fuel mixture.

30

31 Meanwhile, the exhaust shaft member 212 faces the  
32 exhaust port L and cylinder head D thus preventing



1 air/fuel mixture to leave the cylinder 12 or air to  
2 enter therein.

3

4 As the air/fuel mixture enters the cylinder 12 from  
5 the intake port C, the crankshaft P rotates causing  
6 the piston M to retract, causing the shaft members  
7 210, 212 and hence recesses 214, 216, to rotate in  
8 unison by virtue of them being interconnected by  
9 connecting means to the gearing 114.

10

11 As the piston M begins to extend, the recess 214  
12 rotates to face the cylinder 12 and cylinder head D.  
13 Thus preventing any ingress or leakage of air/fuel  
14 mixture from the cylinder 12 on the compression  
15 stroke, as shown in Fig. 3b.

16

17 Meanwhile, the exhaust shaft member 212 will  
18 likewise have rotated with the recess 216 now facing  
19 the cylinder head D completely. Thus preventing an  
20 ingress of air or an egress of air/fuel mixture.

21

22 On the compression stroke, the crankshaft P rotates  
23 causing the piston M to extend compressing the  
24 air/fuel mixture. The interconnected shaft members  
25 210, 212 and recesses 214, 216 similarly rotate.

26

27 As the piston M becomes fully extended on the  
28 compression stroke, the intake recess 214 at this  
29 point completely faces the cylinder head D and is  
30 thus closed off preventing any egress of compressed  
31 air/fuel mixture, as shown in Fig. 3c.

32

1 A spark plug K (not shown for convenience in Figs.  
2 3a-d), ignites the compressed air/fuel mixture in  
3 the cylinder 12.

4  
5 Alternatively, in a diesel engine, the heat caused  
6 by compressing the air/fuel mixture alone will  
7 result in combustion.

8  
9 The resultant combustion causes the piston M to be  
10 fired to a retracted position causing the crankshaft  
11 P and shaft members 210, 212 to rotate.

12  
13 The intake recess 214 will rotate facing both the  
14 cylinder head D and the intake port C.

15  
16 The exhaust recess 216 will rotate facing the  
17 cylinder 12 and exhaust port L to allow an egress of  
18 combusted gases, as shown in Fig. 3d.

19  
20 The piston M then extends exhausting the combusted  
21 gases out through the recess 216 into the exhaust  
22 port L by virtue of the rotating crankshaft.

23  
24 Meanwhile, rotation of the crankshaft P will cause  
25 the intake recess 214 to rotate and face the inlet  
26 port C and the cylinder 12 to allow the cycle to  
27 begin again.

28  
29 The exhaust recess 216 will likewise rotate facing  
30 the exhaust port L and the cylinder head D, as shown  
31 in Fig. 3a.

32

1 In a third embodiment of the present invention there  
- 2 is provided apparatus 400, as shown in Figs. 5 and  
3 9, having apparatus 200 as previously described in  
4 the second embodiment, wherein the intake shaft  
5 member 210 and the exhaust shaft member 212 are of  
6 the form of a hollow cylindrical intake shaft member  
7 410 and a hollow cylindrical exhaust shaft member  
8 412.

9

10 In this way, it should be realised that the heavy  
11 intake manifold (not shown) and outlet manifold 116,  
12 can be replaced by single, less heavy and  
13 complicated manifolds 418, 420, which allow the  
14 ingress of air/fuel mixture and egress of combusted  
15 gases through the hollow shaft members 410, 412.

16

17 The shaft members 410, 412 are presented to (above)  
18 the cylinder 12 to allow an ingress of air/fuel  
19 mixture thereto through aperture 414, and an egress  
20 of exhaust gases therefrom through aperture 416.

21

22 In this third embodiment, the air/fuel mixture  
23 passes through the hollow intake shaft member 410  
24 and exits through the aperture 414 into the cylinder  
25 12.

26

27 After the compression and combustion strokes, the  
28 exhaust gases exit the cylinder 12 through the  
29 aperture 416 and leave via the hollow exhaust shaft  
30 member 412.

31

32 The shaft members 410, 412 are connected to the

1 crankshaft P by connection means (not shown) coupled  
2 to gearing 114.

3

4 Alternatively, the shaft members 410, 412 may be  
5 coupled to the crankshaft P by a belt.

6

7 It is conceived that rotation of the shaft members  
8 410, 412 although specifically described as being  
9 coupled to and controlled by the crankshaft P, may  
10 be independently and controllably adjustable.

11

12 Furthermore, both shaft members 410, 412 may be  
13 driven independently of the crankshaft P and of each  
14 other.

15

16 In a fourth embodiment of the present invention,  
17 there is provided apparatus 200 wherein the shaft  
18 members 210, 212 are of the form of hollow shaft  
19 members 300, as shown in Figs. 4a and 4b.

20 Each shaft member 300 has an inner hollow  
21 cylindrical tube 310, rotatably mounted within an  
22 outer hollow cylindrical tube 312, also rotatably  
23 mounted.

24

25 The tubes 310, 312 have apertures 314, 316 which  
26 correspondingly serve to allow an ingress of  
27 air/fuel mixture and egress of exhaust gases to pass  
28 therethrough.

29

30 The apertures 314, 316, when appropriately aligned,  
31 form a passage 326.

32

1 The area of the passage 326 is adjusted and  
2 controlled by the speed of rotation of the tubes  
3 310, 312 relative to one another.

4

5 Rotation of the tubes 310, 312 is controlled by  
6 gears 318, 320 located around the circumference of  
7 respective cylindrical buttressed ends 322, 324 of  
8 the tubes 310, 312.

9

10 Rotation of the tubes 310, 312 may be coupled to the  
11 crankshaft P with independently controllable/  
12 adjustable means for varying the speed of rotation  
13 of the tubes 310, 312.

14

15 Alternatively, both tubes 310, 312 may be driven  
16 independently of the crankshaft P and of each other,  
17 with controllable/ adjustable means for varying the  
18 speed of rotation of the tubes 310, 312.

19

20 It will be recognised that the tubes 310, 312 may  
21 also be belt driven or the like, independently of,  
22 or coupled to, the crankshaft P.

23

24 The speed of rotation of the inner tube 310,  
25 relative to the outer tube 312, is such that the  
26 area of the passage 326 maximises or restricts the  
27 rate of ingress or egress of air/fuel mixture or  
28 exhaust gases. In this way, the rotatable shaft  
29 members 300 offer a variable valve timing and  
30 variable valve size.

31

32 With reference to Figs. 4a and 4b, it is to be

1 understood that both tubes 310, 312 do not move  
2 horizontally/longitudinally. The apertures 314, 316  
3 share a common centre-line C/L, and are shown offset  
4 for illustrative purposes only.

5  
6 Common to all embodiments and with regard to sealing  
7 of the various shaft members 110, 210, 212, 310,  
8 312, 410, 412 of the present invention, these will  
9 be as tight a fit as possible cognisant of the  
10 expansion of materials of the individual,  
11 respective, components that will occur once the  
12 engine reaches working temperature.

13  
14 The shaft members 110, 210, 212, 310, 312, 410, 412  
15 include gas tight seals (not shown) incorporated on  
16 the outside faces of bearing races (not shown), of  
17 support bearings (not shown), that will be spaced  
18 along the rotating shaft members 110, 210, 212, 310,  
19 312, 410, 412 between the cylinder 12.

20  
21 Gas tight paddles (not shown) are located within  
22 apertures (not shown) of the shaft members 110, 210,  
23 212, 310, 312, 410, 412, at either side of the  
24 respective recesses and apertures 112, 214, 216,  
25 314, 316, 414, 416, of the axis of rotation.

26  
27 Springs (not shown) are located at the base of the  
28 paddles within the apertures. These serve to force  
29 the paddles outwards towards and against the inside  
30 surfaces of the cylinder head D, within which the  
31 shaft members rotate, so ensuring a gas tight seal  
32 in a similar way to the WANKEL rotary engine.

1 Common to all embodiments, it should be realised  
2 that the shaft members 110, 210, 212, 310, 312, 410,  
3 412 may be of the form of extended or adapted shaft  
4 members 510, 512, rotatably mounted, with a  
5 plurality of recesses or apertures 514, 516  
6 corresponding to the number of cylinders 12, as  
7 shown in Fig. 6.

8  
9 Furthermore, the recesses 112, 214, 216 and  
10 apertures 314, 316, 414, 416 of the corresponding  
11 shaft members 110, 210, 212, 310, 312, 410, 412 can  
12 be as wide as the diameter of the cylinder 12 above  
13 which they sit. This means that a far greater area  
14 will be available for an ingress of air/fuel mixture  
15 or egress of exhausted gases, than might be  
16 associated with conventional valves.

17  
18 The hollow intake shaft members (310, 312,) 410, 510  
19 may form an integral part of an inlet system (not  
20 shown), or may feed into, much simplified, single  
21 branch manifolds 418, at the respective open end of  
22 the shaft members (310, 312), 410, 510 at an end of  
23 the cylinder head D.

24  
25 The hollow exhaust shaft members (310, 312), 412,  
26 512 may form an integral part of an exhaust system  
27 (not shown), or may feed into, much simplified,  
28 single branch manifolds 420, at respective open ends  
29 of the shaft members (310, 312), 412, 512 at an end  
30 of the cylinder head D.

31

32 In this way, the air/fuel mixture and exhaust gases

1 would not be required to travel via individual  
2 openings within the cylinder head D to individual,  
3 heavy, complicated, and expensive multiple branches  
4 of intake/exhaust manifolds, feeding the  
5 intake/exhaust ports C, L to each cylinder 12.

6

7 The present invention as described, has a reduced  
8 size compared to a conventional engine 10 and offers  
9 greater flexibility to the location, installation,  
10 and utilisation of internal combustion engines.

11

12 The simpler design will have favourable implications  
13 as to complexity, overall size of the engine,  
14 efficiency, noise and reliability, finance of raw  
15 materials, manufacturing, etc.

16

17 For the sake of clarity, it should be understood  
18 that fuel injectors/carburettors, and the spark  
19 plug, have been omitted from Figs. 2a-d and 3a-d but  
20 may be part of the cylinder head assembly.

21

22 The foregoing description refers to the induction of  
23 air/fuel mixture, as will be the case where a  
24 carburettor or manifold fuel injection is used. It  
25 will be appreciated that the invention may equally  
26 be applied to direct fuel injection engines, in  
27 which case the induction will be of charge air  
28 without fuel.

29

30 Modifications and improvements may be made to the  
31 above without departing from the scope of the  
32 present invention.



1     CLAIMS

2

3     1.    A cylinder head assembly comprising a cylinder  
4     head having an inlet passage and an outlet passage  
5     for communication, in use, with a cylinder, and at  
6     least one rotatably mounted shaft member interposed  
7     between the inlet and outlet passages and the  
8     cylinder, the shaft member(s) having passage means  
9     to allow an ingress of air mixture from the inlet  
10    passage to the cylinder at a first desired  
11    rotational position, and to allow an egress of  
12    combusted gases from the cylinder through the outlet  
13    passage at a second desired rotational position and  
14    to prevent the air or combusted gases from entering  
15    or exiting the cylinder at a third desired  
16    rotational position.

17

18    2.    A cylinder head assembly according to claim 1,  
19    in which there are two shaft members, one  
20    cooperating with the inlet passage and one with the  
21    outlet passage.

22

23    3.    A cylinder head assembly as claimed in claim 2,  
24    in which the shaft members are coupled, in use, to a  
25    crankshaft with means for independently controlling  
26    or adjusting the speed of rotation of said shaft  
27    members.

28

29    4.    A cylinder head assembly as claimed in claim 2,  
30    in which the shaft members are driven independently  
31    of the crankshaft, and of each other, with means for

1 individually controlling or adjusting the speed of  
2 rotation of said shaft members.

3

4 5. A cylinder head assembly according to any  
5 preceding claim, in which the shaft member or each  
6 shaft member is substantially solid.

7

8 6. A cylinder head assembly according to claim 5,  
9 in which the passage means comprises a recess in the  
10 shaft member or a respective recess in each of the  
11 shaft members.

12

13 7. A cylinder head assembly according to claim 2,  
14 in which each shaft member is hollow; each shaft  
15 member having at least one aperture located around a  
16 portion of its circumference, wherein the inlet  
17 shaft member allows an ingress of air/fuel mixture  
18 from the inlet shaft member to enter said cylinder  
19 when the aperture in the inlet shaft is presented to  
20 the cylinder, and the outlet shaft member allows an  
21 egress of combusted gases to exit the cylinder when  
22 the aperture in the outlet shaft member is presented  
23 to the cylinder.

24

25 8. A cylinder head assembly according to claim 7,  
26 in which each shaft member is provided with an inner  
27 hollow tube member rotatably mounted within said  
28 shaft member; each inner tube member having at least  
29 one aperture located around a portion of its  
30 circumference; rotation of said inner tube member  
31 within the respective hollow shaft members providing  
32 a variable size effective aperture, which allows a

1 variable ingress of combustion air to enter said  
2 cylinder through the effective aperture in the inlet  
3 shaft member, and allows a variable egress of  
4 combusted gases from the cylinder to exit through  
5 the effective aperture in the outlet shaft member.  
6

7 9. A cylinder head assembly according to claim 8,  
8 in which the speed of rotation of the inner and  
9 outer tube members are such that the effective  
10 aperture maximises or restricts the rate of ingress  
11 of air, or egress of exhaust gases, through the  
12 respective inner tube members.  
13

14 10. A cylinder head assembly as claimed in claim 8  
15 or claim 9, in which the inner tube members are  
16 coupled, in use, to a crankshaft with means for  
17 independently controlling or adjusting the speed of  
18 rotation of said tube members.  
19

20 11. A cylinder head assembly as claimed in claim 8  
21 or claim 9, in which the tube members are driven  
22 independently of the crankshaft, and of each other,  
23 with means for individually controlling or adjusting  
24 the speed of rotation of said tube members.  
25

26 12. A cylinder head assembly according to any  
27 preceding claim, in which the shaft member(s) extend  
28 over a number of cylinders, the shaft member(s)  
29 having a corresponding number of passage means.  
30

1 13. A cylinder head assembly according to any  
2 preceding claim, in which the shaft member(s) have  
3 gas tight seal assemblies.  
4

5 14. A method of allowing an ingress and egress of  
6 combustion air and combusted gases from a cylinder  
7 comprising the steps of:

8 presenting a passage means within a shaft  
9 member to an inlet passage;

10 retracting of a piston within a cylinder to  
11 allow an induction of air from the inlet passage  
12 through said passage means into the cylinder;

13 rotating the shaft member to prevent any  
14 leakage of air upon a compression of the air in the  
15 cylinder by the piston;

16 combusting air/fuel mixture in the cylinder to  
17 cause said piston to retract;

18 extending the piston in the cylinder;

19 presenting passage means to the cylinder and  
20 an outlet passage to allow an egress of combusted  
21 gases; and

22 repeating the above steps.  
23

24 15. A method according to claim 14, in which the  
25 same passage means is used for induction and egress.  
26

27 16. A method according to claim 14, in which the  
28 passage means is formed by an aperture in at least  
29 one hollow shaft, and the method further includes  
30 the step of varying the effective size of the  
31 aperture to restrict or maximise the amount of fluid  
32 flow through the aperture.



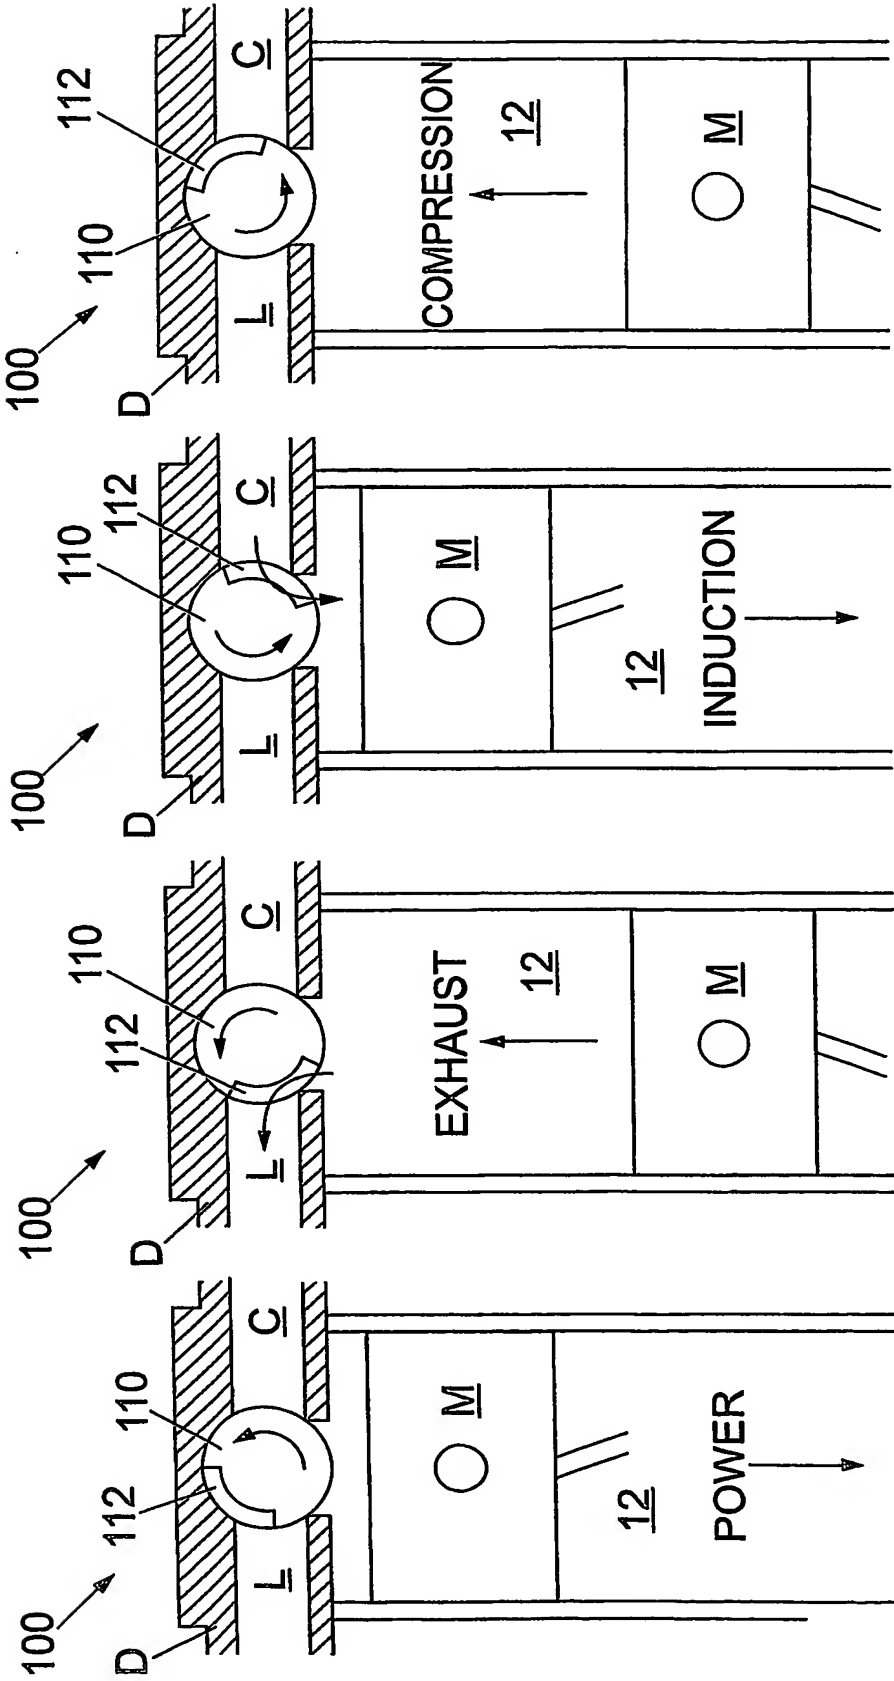


Fig. 2b

Fig. 2a

Fig. 2d

Fig. 2c

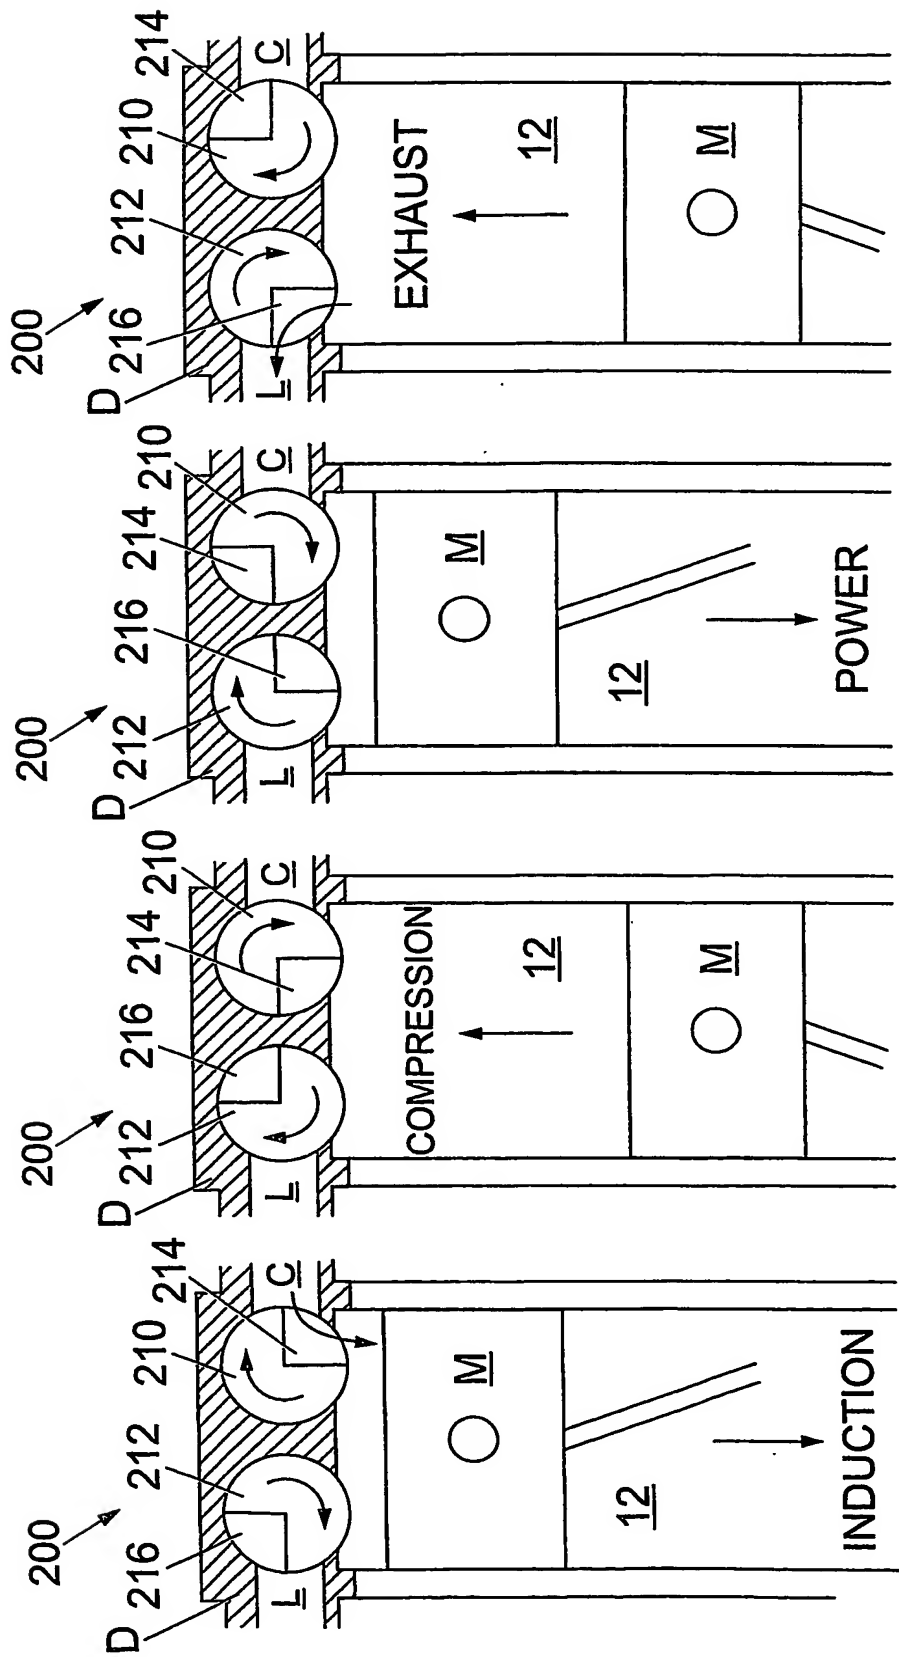


Fig. 3a

Fig. 3b

Fig. 3c

Fig. 3d

4 / 6

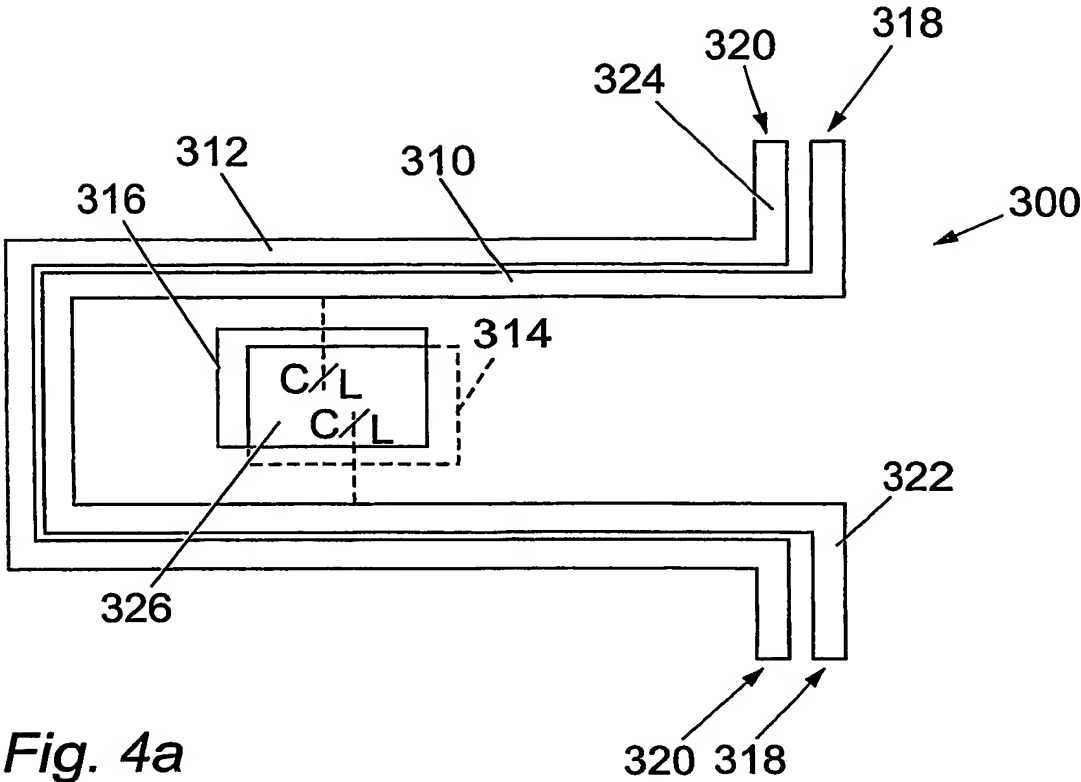


Fig. 4a



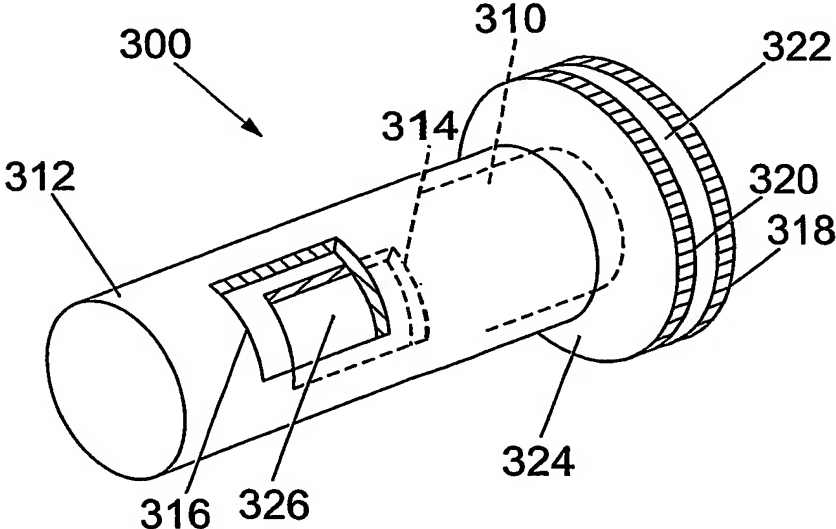


Fig. 4b

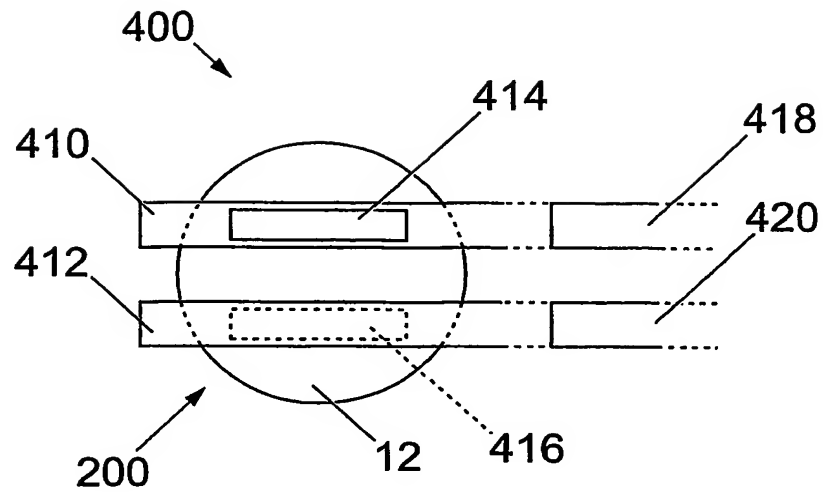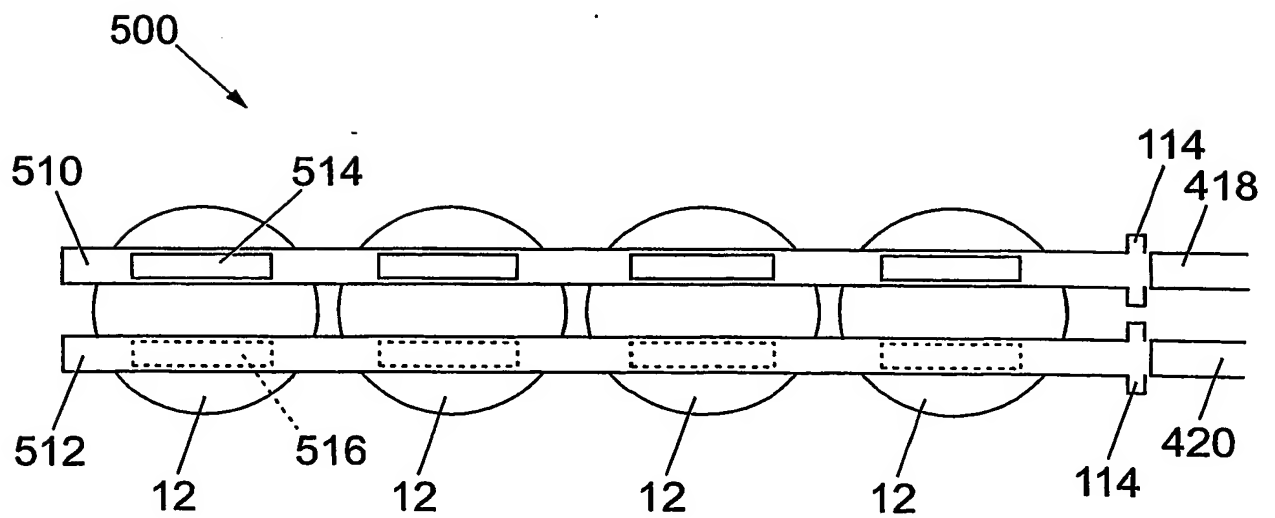

5 / 6

*Fig. 5**Fig. 6*

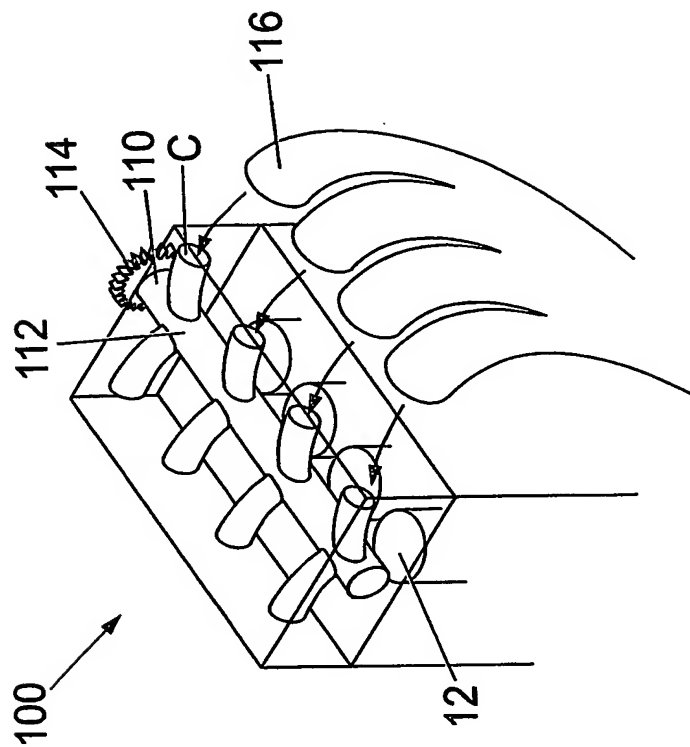


Fig. 7

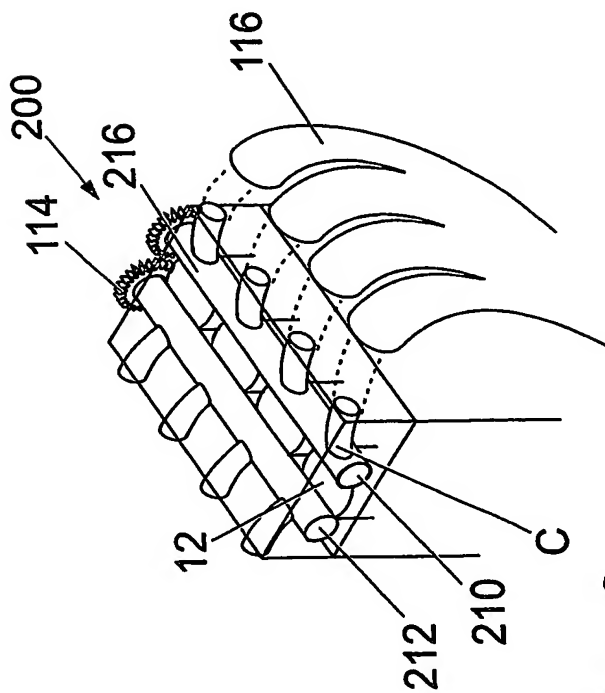


Fig. 8

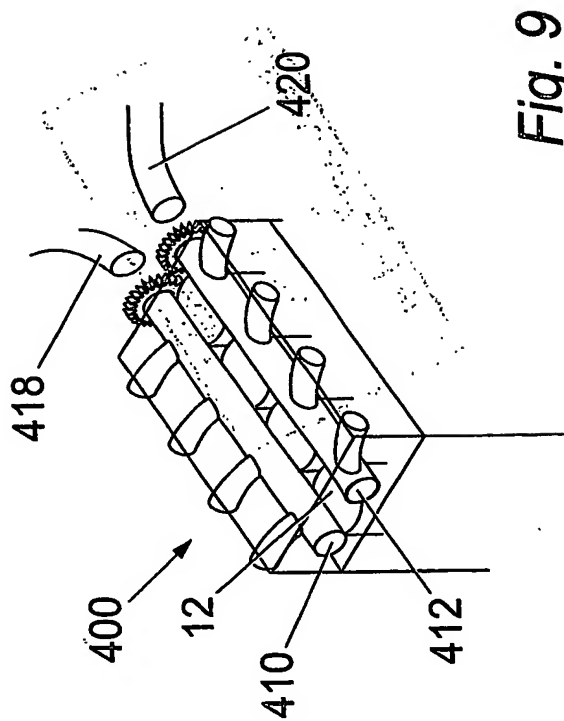


Fig. 9

**PCT****REQUEST**

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office use only

PCT/GB 2003 / 0 0 3 5 1 7	
International Application No.	
12 AUGUST 2003	12.08.2003
International Filing Date	
United Kingdom Patent Office PCT International Application	
Name of receiving Office and "PCT International Application"	
Applicant's or agent's file reference (if desired) (12 characters maximum) P31562A/CCI/GEM	

<b>Box No. I TITLE OF INVENTION</b>	
"Improvements in or Relating to Internal Combustion Engines"	
<b>Box No. II APPLICANT</b>	
<input checked="" type="checkbox"/> This person is also inventor	
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)	
Boulton, Andrew J Gainsborough Park Glenthams Road Gainsborough Lincolnshire DN21 1SA GB	
Telephone No.	
Facsimile No.	
Teleprinter No.	
Applicant's registration No. with the Office	
State (that is, country) of nationality: GB	
State (that is, country) of residence: GB	
This person is applicant for the purposes of: <input checked="" type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box	
<b>Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)</b>	
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)	
This person is:	
<input type="checkbox"/> applicant only	
<input type="checkbox"/> applicant and inventor	
<input type="checkbox"/> inventor only (If this check-box is marked, do not fill in below.)	
Applicant's registration No. with the Office	
State (that is, country) of nationality:	
State (that is, country) of residence:	
This person is applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box	
<input type="checkbox"/> Further applicants and/or (further) inventors are indicated on a continuation sheet.	
<b>Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE</b>	
The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as: <input checked="" type="checkbox"/> agent <input type="checkbox"/> common representative	
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)	
Murgitroyd & Company Scotland House 165-169 Scotland Street Glasgow G5 8PL GB	
Telephone No. 0141 307 8400	
Facsimile No. 0141 307 8401	
Teleprinter No.	
Agent's registration No. with the Office	
<input type="checkbox"/> Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.	

## Box No. V DESIGNATION OF STATES

Mark the applicable check-boxes below; at least one must be marked.

The following designations are hereby made under Rule 4.9(a):

## Regional Patent

- ☒ AP ARIPO Patent: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, MZ Mozambique, SD Sudan, SL Sierra Leone, SZ Swaziland, TZ United Republic of Tanzania, UG Uganda, ZM Zambia, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT (if other kind of protection or treatment desired, specify on dotted line) .....
- ☒ EA Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ EP European Patent: AT Austria, BE Belgium, BG Bulgaria, CH & LI Switzerland and Liechtenstein, CY Cyprus, CZ Czech Republic, DE Germany, DK Denmark, EE Estonia, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, SI Slovenia, SK Slovakia, TR Turkey, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ OA OAPI Patent: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GQ Equatorial Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line) .....

## National Patent (if other kind of protection or treatment desired, specify on dotted line):

- |                                                                                 |                                                                                        |                                                                               |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> AE United Arab Emirates .....               | <input checked="" type="checkbox"/> GM Gambia .....                                    | <input checked="" type="checkbox"/> NZ New Zealand .....                      |
| <input checked="" type="checkbox"/> AG Antigua and Barbuda .....                | <input checked="" type="checkbox"/> HR Croatia .....                                   | <input checked="" type="checkbox"/> OM Oman .....                             |
| <input checked="" type="checkbox"/> AL Albania .....                            | <input checked="" type="checkbox"/> HU Hungary .....                                   | <input checked="" type="checkbox"/> PH Philippines .....                      |
| <input checked="" type="checkbox"/> AM Armenia .....                            | <input checked="" type="checkbox"/> ID Indonesia .....                                 | <input checked="" type="checkbox"/> PL Poland .....                           |
| <input checked="" type="checkbox"/> AT Austria .....                            | <input checked="" type="checkbox"/> IL Israel .....                                    | <input checked="" type="checkbox"/> PT Portugal .....                         |
| <input checked="" type="checkbox"/> AU Australia .....                          | <input checked="" type="checkbox"/> IN India .....                                     | <input checked="" type="checkbox"/> RO Romania .....                          |
| <input checked="" type="checkbox"/> AZ Azerbaijan .....                         | <input checked="" type="checkbox"/> IS Iceland .....                                   | <input checked="" type="checkbox"/> RU Russian Federation .....               |
| <input checked="" type="checkbox"/> BA Bosnia and Herzegovina .....             | <input checked="" type="checkbox"/> JP Japan .....                                     |                                                                               |
| <input checked="" type="checkbox"/> BB Barbados .....                           | <input checked="" type="checkbox"/> KE Kenya .....                                     | <input checked="" type="checkbox"/> SC Seychelles .....                       |
| <input checked="" type="checkbox"/> BG Bulgaria .....                           | <input checked="" type="checkbox"/> KG Kyrgyzstan .....                                | <input checked="" type="checkbox"/> SD Sudan .....                            |
| <input checked="" type="checkbox"/> BR Brazil .....                             | <input checked="" type="checkbox"/> KP Democratic People's Republic of Korea .....     | <input checked="" type="checkbox"/> SE Sweden .....                           |
| <input checked="" type="checkbox"/> BY Belarus .....                            |                                                                                        | <input checked="" type="checkbox"/> SG Singapore .....                        |
| <input checked="" type="checkbox"/> BZ Belize .....                             | <input checked="" type="checkbox"/> KR Republic of Korea .....                         | <input checked="" type="checkbox"/> SK Slovakia .....                         |
| <input checked="" type="checkbox"/> CA Canada .....                             | <input checked="" type="checkbox"/> KZ Kazakhstan .....                                | <input checked="" type="checkbox"/> SL Sierra Leone .....                     |
| <input checked="" type="checkbox"/> CH & LI Switzerland and Liechtenstein ..... | <input checked="" type="checkbox"/> LC Saint Lucia .....                               | <input checked="" type="checkbox"/> TJ Tajikistan .....                       |
| <input checked="" type="checkbox"/> CN China .....                              | <input checked="" type="checkbox"/> LK Sri Lanka .....                                 | <input checked="" type="checkbox"/> TM Turkmenistan .....                     |
| <input checked="" type="checkbox"/> CO Colombia .....                           | <input checked="" type="checkbox"/> LR Liberia .....                                   | <input checked="" type="checkbox"/> TN Tunisia .....                          |
| <input checked="" type="checkbox"/> CR Costa Rica .....                         | <input checked="" type="checkbox"/> LS Lesotho .....                                   | <input checked="" type="checkbox"/> TR Turkey .....                           |
| <input checked="" type="checkbox"/> CU Cuba .....                               | <input checked="" type="checkbox"/> LT Lithuania .....                                 | <input checked="" type="checkbox"/> TT Trinidad and Tobago .....              |
| <input checked="" type="checkbox"/> CZ Czech Republic .....                     | <input checked="" type="checkbox"/> LU Luxembourg .....                                |                                                                               |
| <input checked="" type="checkbox"/> DE Germany .....                            | <input checked="" type="checkbox"/> LV Latvia .....                                    | <input checked="" type="checkbox"/> TZ United Republic of Tanzania .....      |
| <input checked="" type="checkbox"/> DK Denmark .....                            | <input checked="" type="checkbox"/> MA Morocco .....                                   | <input checked="" type="checkbox"/> UA Ukraine .....                          |
| <input checked="" type="checkbox"/> DM Dominica .....                           | <input checked="" type="checkbox"/> MD Republic of Moldova .....                       | <input checked="" type="checkbox"/> UG Uganda .....                           |
| <input checked="" type="checkbox"/> DZ Algeria .....                            |                                                                                        | <input checked="" type="checkbox"/> US United States of America .....         |
| <input checked="" type="checkbox"/> EC Ecuador .....                            | <input checked="" type="checkbox"/> MG Madagascar .....                                |                                                                               |
| <input checked="" type="checkbox"/> EE Estonia .....                            | <input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia ..... | <input checked="" type="checkbox"/> UZ Uzbekistan .....                       |
| <input checked="" type="checkbox"/> ES Spain .....                              | <input checked="" type="checkbox"/> MN Mongolia .....                                  | <input checked="" type="checkbox"/> VC Saint Vincent and the Grenadines ..... |
| <input checked="" type="checkbox"/> FI Finland .....                            | <input checked="" type="checkbox"/> MW Malawi .....                                    | <input checked="" type="checkbox"/> VN Viet Nam .....                         |
| <input checked="" type="checkbox"/> GB United Kingdom .....                     | <input checked="" type="checkbox"/> MX Mexico .....                                    | <input checked="" type="checkbox"/> YU Yugoslavia .....                       |
| <input checked="" type="checkbox"/> GD Grenada .....                            | <input checked="" type="checkbox"/> MZ Mozambique .....                                | <input checked="" type="checkbox"/> ZA South Africa .....                     |
| <input checked="" type="checkbox"/> GE Georgia .....                            | <input checked="" type="checkbox"/> NO Norway .....                                    | <input checked="" type="checkbox"/> ZM Zambia .....                           |
| <input checked="" type="checkbox"/> GH Ghana .....                              |                                                                                        | <input checked="" type="checkbox"/> ZW Zimbabwe .....                         |

Check-boxes below reserved for designating States which have become party to the PCT after issuance of this sheet:

- ☒ PG .....
- ☒ NI .....
- ☒ SY .....

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation (including fees) must reach the receiving Office within the 15-month time limit.)

<b>Box No. VI PRIORITY CLAIM</b>				
The priority of the following earlier application(s) is hereby claimed:				
Filing date of earlier application (day/month/year)	Number of earlier application	Where earlier application is:		
		national application: country or Member of WTO	regional application: regional Office	international application: receiving Office
item (1) 12 August 2002	0218674.0	United Kingdom		
item (2)				
item (3)				
item (4)				
item (5)				
<input type="checkbox"/> Further priority claims are indicated in the Supplemental Box.				
The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of this international application is the receiving Office) identified above as:				
<input checked="" type="checkbox"/> all items <input type="checkbox"/> item (1) <input type="checkbox"/> item (2) <input type="checkbox"/> item (3) <input type="checkbox"/> item (4) <input type="checkbox"/> item (5) <input type="checkbox"/> other, see Supplemental Box				
* Where the earlier application is an ARIPO application, indicate at least one country party to the Paris Convention for the Protection of Industrial Property or one Member of the World Trade Organization for which that earlier application was filed (Rule 4.10(b)(ii)): . . . .				
<b>Box No. VII INTERNATIONAL SEARCHING AUTHORITY</b>				
Choice of International Searching Authority (ISA) (if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):				
ISA / EPO				
Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):				
Date (day/month/year)	Number	Country (or regional Office)		
<b>Box No. VIII DECLARATIONS</b>				
The following declarations are contained in Boxes Nos. VIII (i) to (v) (mark the applicable check-boxes below and indicate in the right column the number of each type of declaration):				Number of declarations
<input type="checkbox"/> Box No. VIII (i)	Declaration as to the identity of the inventor			:
<input type="checkbox"/> Box No. VIII (ii)	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent			:
<input type="checkbox"/> Box No. VIII (iii)	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application			:
<input type="checkbox"/> Box No. VIII (iv)	Declaration of inventorship (only for the purposes of the designation of the United States of America)			:
<input type="checkbox"/> Box No. VIII (v)	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty			:

## Box No. IX CHECK LIST; LANGUAGE OF FILING

This international application contains:

(a) in paper form, the following number of sheets:

request (including declaration sheets) : 4  
 description (excluding sequence listings and/or tables related thereto) : 23  
 claims : 4  
 abstract : 1  
 drawings : 6

Sub-total number of sheets : 38

sequence listings :  
 tables related thereto :

(for both, actual number of sheets if filed in paper form, whether or not also filed in computer readable form; see (c) below)

Total number of sheets : 38

(b) ☐ only in computer readable form (Section 801(a)(i))

(i) ☐ sequence listings  
 (ii) ☐ tables related thereto

(c) ☐ also in computer readable form (Section 801(a)(ii))

(i) ☐ sequence listings  
 (ii) ☐ tables related thereto

Type and number of carriers (discette, CD-ROM, CD-R or other) on which are contained the

☐ sequence listings: .....  
☐ tables related thereto: .....

(additional copies to be indicated under items 9(ii) and/or 10(ii), in right column)

This international application is accompanied by the following item(s) (mark the applicable check-boxes below and indicate in right column the number of each item):

1. ☐ fee calculation sheet :  
 2. ☐ original separate power of attorney :  
 3. ☐ original general power of attorney :  
 4. ☐ copy of general power of attorney; reference number, if any: ..... :  
 5. ☐ statement explaining lack of signature :  
 6. ☐ priority document(s) identified in Box No. VI as item(s): ..... :  
 7. ☐ translation of international application into (language): ..... :  
 8. ☐ separate indications concerning deposited microorganism or other biological material :  
 9. ☐ sequence listings in computer readable form (indicate type and number of carriers)  
     (i) ☐ copy submitted for the purposes of international search under Rule 13ter only (and not as part of the international application) :  
     (ii) ☐ (only where check-box (b)(i) or (c)(i) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Rule 13ter :  
     (iii) ☐ together with relevant statement as to the identity of the copy or copies with the sequence listings mentioned in left column :  
 10. ☐ tables in computer readable form related to sequence listings (indicate type and number of carriers)  
     (i) ☐ copy submitted for the purposes of international search under Section 802(b-quater) only (and not as part of the international application) :  
     (ii) ☐ (only where check-box (b)(ii) or (c)(ii) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Section 802(b-quater) :  
     (iii) ☐ together with relevant statement as to the identity of the copy or copies with the tables mentioned in left column :  
 11. ☒ other (specify): PF.23(77) ..... : 1

Figure of the drawings which should accompany the abstract: 2

Language of filing of the international application:

English

## Box No. X SIGNATURE OF APPLICANT, AGENT OR COMMON REPRESENTATIVE

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).

Murgitroyd &amp; Co.

Murgitroyd & Company  
Agent for the Applicant

For receiving Office use only

1. Date of actual receipt of the purported international application:	12 AUGUST 2003 12.08.2003	2. Drawings: <input checked="" type="checkbox"/> received:  <input type="checkbox"/> not received:
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:		
4. Date of timely receipt of the required corrections under PCT Article 11(2):		
5. International Searching Authority (if two or more are competent): ISA /	6. <input checked="" type="checkbox"/> Transmittal of search copy delayed until search fee is paid	

For International Bureau use only

Date of receipt of the record copy by the International Bureau:

1     Improvements in or Relating to Internal Combustion  
2     Engines

3

4     This invention relates to improvements in or  
5     relating to internal combustion engines, and in  
6     particular, but not exclusively, to improvements  
7     relating to replacement apparatus for the intake and  
8     exhaust valves of internal combustion engines.

9

10    Conventional four stroke internal combustion engines  
11    involve a four stage cycle. Firstly, there is an  
12    intake of air/fuel mixture into a cylinder; known as  
13    "intake stroke". Secondly, a piston within the  
14    cylinder compresses the air/fuel mixture; known as  
15    "compression stroke". Thirdly, the compressed  
16    air/fuel mixture is ignited in the cylinder causing  
17    combustion; known as "combustion stroke". And  
18    lastly, the combusted gases are exhausted; known as  
19    "exhaust stroke".

20

21    A four stroke internal combustion engine comprises  
22    an intake valve to allow an ingress of air/fuel

1 mixture into a cylinder, and an exhaust valve, to  
2 allow an egress of exhausted gases after combustion  
3 of the air/fuel mixture.

4  
5 The timing of the opening and closing of the valves  
6 is vital to an engines performance.

7  
8 To allow the piston to draw-in the fuel/air mixture  
9 (or air alone in the case of a direct injection  
10 engine), the intake valve needs to open as the  
11 piston moves from an extended position to a  
12 retracted position on the intake stroke.

13  
14 The exhaust valve needs to be opened as the piston  
15 is extended in the exhaust stroke.

16  
17 Both the intake and the exhaust valves each comprise  
18 a rocker arm and a valve return spring, with the  
19 rocker arm being actuated by a cam or a lobe located  
20 on a camshaft.

21  
22 The valves act against the valve return springs,  
23 where the valves are fired in one direction, only  
24 then to stop at the extent of their travel, and be  
25 sent flying in the opposite direction. This happens  
26 many times a minute which wastefully drains power  
27 from the engine. This also causes noise, vibration  
28 and harshness.

29  
30 As the camshaft rotates, the shape of the cam which  
31 actuates the rocker arm, determines the timing of  
32 the opening and closing of the intake and exhaust



1 valves.

2

3 Conventional designs of cams, particularly fixed  
4 cams, will only operate optimally over a limited  
5 range of speeds.

6

7 According to one aspect of the present invention, a  
8 cylinder head assembly comprises a cylinder head  
9 having an inlet passage and an outlet passage for  
10 communication, in use, with a cylinder, and at least  
11 one rotatably mounted shaft member interposed  
12 between the inlet and outlet passages and the  
13 cylinder, the shaft member(s) having passage means  
14 to allow an ingress of air mixture from the inlet  
15 passage to the cylinder at a first desired  
16 rotational position, and to allow an egress of  
17 combusted gases from the cylinder through the outlet  
18 passage at a second desired rotational position and  
19 to prevent the air or combusted gases from entering  
20 or exiting the cylinder at a third desired  
21 rotational position.

22

23 There may be two shaft members, one cooperating with  
24 the inlet passage and one with the outlet passage.

25

26 Preferably, the shaft members are coupled, in use,  
27 to a crankshaft with means for independently  
28 controlling or adjusting the speed of rotation of  
29 said shaft members.

30

31 Alternatively, the shaft members are driven  
32 independently of the crankshaft, and of each other,

1 with means for individually controlling or adjusting  
2 the speed of rotation of said shaft members.

3

4 The shaft member or each shaft member may be  
5 substantially solid, and the passage means may  
6 comprise a recess in the shaft member or a  
7 respective recess in each of the shaft members.

8

9 Alternatively, each shaft member may be hollow; each  
10 shaft member having at least one aperture located  
11 around a portion of its circumference, wherein the  
12 inlet shaft member allows an ingress of air/fuel  
13 mixture through the inlet shaft member to enter said  
14 cylinder when the aperture in the inlet shaft is  
15 presented to the cylinder, and the outlet shaft  
16 member allows an egress of combusted gases to exit  
17 the cylinder when the aperture in the outlet shaft  
18 member is presented to the cylinder.

19

20 Preferably each shaft member is provided with an  
21 inner hollow tube member rotatably mounted within  
22 said shaft member; each inner tube member having at  
23 least one aperture located around a portion of its  
24 circumference; rotation of said inner tube member  
25 within the respective hollow shaft members providing  
26 a variable size effective aperture, which allows a  
27 variable ingress of combustion air to enter said  
28 cylinder through the effective aperture in the inlet  
29 shaft member, and allows a variable egress of  
30 combusted gases from the cylinder to exit through  
31 the effective aperture in the outlet shaft member.

1 Preferably also, the speed of rotation of the inner  
2 and outer tube members are such that the effective  
3 aperture maximises or restricts the rate of ingress  
4 of air, or egress of exhaust gases, through the  
5 respective inner tube members.

6  
7 The inner tube members may be coupled, in use, to a  
8 crankshaft with means for independently controlling  
9 or adjusting the speed of rotation of said tube  
10 members. Alternatively, the tube members may be  
11 driven independently of the crankshaft, and of each  
12 other, with means for individually controlling or  
13 adjusting the speed of rotation of said tube  
14 members.

15  
16 Typically, the cylinder head assembly will form part  
17 of a multi-cylinder engine with the shaft member(s)  
18 extending over a number of cylinders, the shaft  
19 member(s) having a corresponding number of passage  
20 means.

21  
22 The shaft member(s) suitably have gas tight seal  
23 assemblies.

24  
25 From another aspect, the invention provides a method  
26 of allowing an ingress and egress of combustion air  
27 and combusted gases from a cylinder comprising the  
28 steps of:

29 presenting a passage means within a shaft  
30 member to an inlet passage;

31 retracting of a piston within a cylinder to  
32 allow an induction of air from the inlet passage

1 through said passage means into the cylinder;  
2 rotating the shaft member to prevent any  
3 leakage of air upon a compression of the air in the  
4 cylinder by the piston;  
5 combusting air/fuel mixture in the cylinder to  
6 cause said piston to retract;  
7 extending the piston in the cylinder;  
8 presenting passage means to the cylinder and  
9 an outlet passage to allow an egress of combusted  
10 gases; and  
11 repeating the above steps.

12

13 In one form of the method, the same passage means is  
14 used for induction and egress.

15

16 The passage means may be formed by an aperture in at  
17 least one hollow shaft, and the method further  
18 includes the step of varying the effective size of  
19 the aperture to restrict or maximise the amount of  
20 fluid flow through the aperture.

21

22 Embodiments of the present invention will now be  
23 described, by way of example only, with reference to  
24 the accompanying drawings in which:-

25

26 Fig. 1 is a schematic front sectional view of a  
27 conventional four stroke internal combustion  
28 engine;

29

30 Figs. 2a-d are schematic front sectional views  
31 illustrating the workings of a single rotatably  
32 mounted shaft member of the present invention;

1 Figs. 3a-d are schematic front sectional views  
2 illustrating the workings of an alternative  
3 embodiment with two rotatably mounted shaft  
4 members;

5

6 Figs. 4a and 4b are a side view and perspective  
7 side view respectively (shown schematically) of  
8 an alternative shaft member;

9

10 Fig. 5 is a schematic plan view of further  
11 alternative shaft members;

12

13 Fig. 6 is a schematic plan view of shaft member  
14 embodiments applied to more than one cylinder;

15

16 Fig. 7 is a schematic perspective view of  
17 apparatus of a first embodiment;

18

19 Fig. 8 is a schematic perspective view of  
20 apparatus of a second embodiment; and

21

22 Fig. 9 is a schematic perspective view of  
23 apparatus of a third and fourth embodiment;

24

25 With reference to the drawings, and in particular  
26 Fig. 1, there is shown conventional apparatus of a  
27 four stroke internal combustion engine 10.

28

29 The conventional engine 10 comprises the known  
30 element of a cylinder 12 which houses a piston M  
31 which is movably sealed therein.

32

1 The piston M is attached to a crankshaft P by a  
2 connecting rod N and rod bearing O. The crankshaft  
3 P serves to convert the up and down motion of the  
4 piston M into rotational motion; which is utilised  
5 to turn wheels of a vehicle, propellers of a vessel  
6 or aircraft.

7  
8 The conventional engine 10 also comprises the known  
9 element of a cylinder head D having an intake valve  
10 assembly A and an exhaust valve assembly J which are  
11 both intermittently actuated by a camshaft I.  
12 Both valve assemblies A, J have rocker arms 14, 18  
13 with corresponding springs 16, 20, and conventional  
14 poppet valves 22, 24.

15  
16 On the intake stroke of a four stroke engine 10, the  
17 intake valve assembly A is open to allow an ingress  
18 of air/fuel mixture into the cylinder 12 via an  
19 intake port C.

20  
21 Meanwhile, the exhaust valve assembly J is closed.  
22 The piston M will retract drawing the air/fuel  
23 mixture into the cylinder 12.

24  
25 The piston M retracts by virtue of stored energy  
26 being transferred from a flywheel (not shown) to the  
27 piston M via the crankshaft P.

28  
29 It should be understood that on all "non-power  
30 strokes", namely, retraction of the piston M on the  
31 intake stroke, compression of the air/fuel mixture,  
32 and exhausting of the combusted gases, the energy

1 required to drive the piston M is transferred from  
2 the flywheel to the connected crankshaft P.

3

4 As the piston M bottoms out it will change direction  
5 and extend within the cylinder 12. Closure of the  
6 intake valve assembly A allows for the air/fuel  
7 mixture to be compressed within the cylinder 12;  
8 referred to as "compression stroke".

9

10 Again, the exhaust valve assembly J is closed.

11

12 When fully compressed, a spark plug K extending into  
13 the cylinder 12, ignites the compressed mixture to  
14 cause combustion.

15

16 Alternatively, in a diesel engine, the heat caused  
17 by compressing the air/fuel mixture alone will  
18 result in combustion.

19

20 The resultant combustion produces an excess of gases  
21 which force the piston M to retract within the  
22 cylinder 12.

23

24 The exhaust valve assembly J is opened as the piston  
25 M bottoms out to allow an egress of the combusted  
26 gases through an exhaust port L; referred to as  
27 "exhaust stroke".

28

29 As the piston M returns to an extended position, the  
30 exhaust valve assembly J is closed, whereas the  
31 intake valve assembly A is open to start the cycle  
32 again and allow in ingress of air/fuel mixture.

1 It will be realised that the timing of the opening  
2 and closing of the valve assemblies A, J will have a  
3 large bearing on the performance of the engine 10.  
4 If either of the valve assemblies A, J are open on  
5 the compression stroke, then the air/fuel mixture  
6 will not be fully compressed resulting in poor  
7 performance of the engine 10.

8  
9 Lobes or cams 26 located on the camshaft I are  
10 designed to intermittently open and close each of  
11 the valve assemblies A, J as and when required.

12  
13 It will be realised however, that (fixed) cams 26 of  
14 a particular design operate optimally for a given  
15 range of speeds only.

16  
17 The rocker arms 14, 18 act against the corresponding  
18 valves 22, 24 and valve return springs 16, 20. The  
19 valves 22, 24 are fired in one direction, only then  
20 to stop at the extent of their travel, and be sent  
21 flying in the opposite direction. This happens many  
22 times a minute which wastefully drains power from  
23 the engine 10 and can cause noise, vibration and  
24 harshness.

25  
26 In a first embodiment of the present invention, as  
27 illustrated in Figs. 2a-d and Fig. 7, there is  
28 provided apparatus 100 in the form of a cylinder  
29 head assembly comprising a cylinder head D adapted  
30 with a valve assembly replacement shaft member 110  
31 rotatably mounted.

32



1 The shaft member 110 is of the form of a cylindrical  
2 rod with a recess 112 removed around a portion of  
3 the circumference of the shaft member 110 and along  
4 that part of its length which is presented to  
5 (above) the cylinder 12.

6

7 It is to be understood that the shaft member 110 and  
8 recess 112 are presented facing the cylinder  
9 irrespective of the cylinder's orientation; for  
10 example, it may be a horizontal engine, in which  
11 case the recess 112 is presented adjacently facing  
12 the cylinder 12.

13

14 The shaft member 110 is rotatably mounted in the  
15 cylinder head D.

16

17 The shaft member 110 is parallel with, and is co-  
18 operatively driven by, the crankshaft P by virtue of  
19 connecting means (not shown) in the form of a belt  
20 or gearing 114.

21

22 The recess 112 serves to allow an ingress or egress  
23 of air/fuel mixture or exhaust gases to and from the  
24 cylinder 12 upon rotation of the shaft member 110.

25

26 The depth and length of the recess 112 presented to  
27 (above) the cylinder 12 can be of any design and  
28 dimensions to allow optimum ingress and/or egress of  
29 air/fuel mixture and/or combusted gases to and from  
30 the cylinder 12; for example, the recess 112 may be  
31 of uniform depth and length or may have varying

1 depths or lengths, or the recess 112 may also be of  
2 the form of a helix, etc.

3

4 In operation, as shown in Fig. 2a and Fig. 7, there  
5 is an inlet of air from an inlet manifold 116 which  
6 is coupled to a carburettor/fuel injector (not  
7 shown) to form an air/fuel mixture.

8

9 The shaft member 110 is presented such that the  
10 recess 112 faces the intake port C and the cylinder  
11 12 to allow an ingress of air/fuel mixture.

12

13 Rotation of the crankshaft P, initially caused by a  
14 starter motor (not shown) then subsequently by the  
15 transfer of energy from the flywheel, causes contra-  
16 rotation of the shaft member 110 by virtue of  
17 contra-connecting means (not shown) being connected  
18 to the crankshaft P and gearing 114 on the shaft  
19 member 110.

20

21 Rotation of the crankshaft P will cause the piston M  
22 to retract, drawing-in the air/fuel mixture through  
23 the inlet port C, into the cylinder 12.

24

25 Meanwhile, as the piston M is retracted by virtue of  
26 the rotating crankshaft P, the recess 112 of the  
27 shaft member 110 will contra-rotate in unison.

28

29 As the piston M bottoms out, the rotating shaft  
30 member 110 and recess 112 face the intake port C and  
31 the cylinder head D. Thus preventing any ingress or

1 leakage of air/fuel mixture on the compression  
2 stroke, as shown in Fig. 2b.

3

4 On the compression stroke, the piston M is extended  
5 to compress the air/fuel mixture as the crankshaft P  
6 and interconnected shaft member 110 similarly  
7 rotate, as shown in Fig. 2c.

8

9 The recess 112 faces the cylinder head D and the  
10 exhaust port L.

11

12 A spark plug K (not shown for convenience in Figs.  
13 2a-d), ignites the compressed air/fuel mixture in  
14 the cylinder 12.

15

16 Alternatively, in a diesel engine, the heat caused  
17 by compressing the air/fuel mixture alone will  
18 result in combusted gases.

19

20 The resultant combustion causes the piston M to be  
21 fired to a retracted position causing the crankshaft  
22 P and shaft member 110 to rotate.

23

24 The recess 112 meanwhile, will rotate facing both  
25 the exhaust port L and cylinder 12 to allow the  
26 piston M to extend exhausting the combusted gases  
27 out through the recess 112 into the exhaust port L.

28

29 Upon exhaustion of the combusted gases, rotation of  
30 the crankshaft P will cause the recess 112 to rotate  
31 and face the cylinder 12 and inlet port C to allow  
32 the cycle to begin again.

1 As the rotation of the crankshaft P and shaft member  
2 112 are rotating opposite to one another, this will  
3 have a balancing effect which may reduce noise and  
4 vibration of the engine 10.

5  
6 To prevent any unburnt fuel being expelled with the  
7 exhaust gases, fuel injectors (not shown) may be  
8 used to control the flow of fuel into the separate  
9 branches of the inlet manifold. The fuel injectors  
10 would be closed before the recess 112 closes, such  
11 that no unburnt fuel would be exhausted by being  
12 trapped in the recess 112 as the shaft 110 rotates.  
13 Alternatively, the fuel injectors may directly  
14 inject the fuel into the cylinder 12. Hence, only  
15 air would therefore pass through the manifold, via  
16 the recess 112 into the cylinder 12, avoiding  
17 unburnt fuel being trapped in the recess 112, and  
18 being exhausted as the shaft 110 rotates.

19  
20 In a second embodiment of the present invention, as  
21 shown in Figs. 3a-d and Fig. 8, there is provided  
22 apparatus 200 in the form of a cylinder head  
23 assembly comprising a cylinder head D having two  
24 valve assembly replacement shaft members, namely, an  
25 intake shaft member 210 and an exhaust shaft member  
26 212 which are rotatably mounted.

27  
28 The shaft members 210, 212 are of the form as  
29 described above with recesses 214, 216 as also  
30 described above.

31

1 The shaft members 210, 212 are rotatably mounted in  
2 the cylinder head D as before.

3  
4 The shaft members 210, 212 are parallel with, and  
5 are co-operatively driven by, the crankshaft P by  
6 connecting means (not shown) coupled to gearing 114.

7  
8 Alternatively, the shaft may be belt driven from the  
9 crankshaft P.

10  
11 The recesses 214, 216 are as described above, and  
12 serve to allow an ingress of air/fuel mixture and an  
13 egress of combusted gases respectively, into the  
14 cylinder 12 upon rotation of the crankshaft P and  
15 shaft members 210, 212.

16  
17 The depth and length of the recesses 214, 216  
18 presented to (above) the cylinder 12 can be of any  
19 design and dimensions to allow optimum ingress and  
20 egress of air/fuel mixture and combusted gases to  
21 and from the cylinder 12; for example, the recesses  
22 214, 216 may be of uniform depth and length or may  
23 have varying depths or lengths, or they may be of  
24 the form of a helix, etc.

25  
26 In operation, as shown in Fig. 3a, the intake shaft  
27 member 210 is rotated, by the crankshaft P, to face  
28 the intake port C and the cylinder 12 to allow an  
29 ingress of air/fuel mixture.

30  
31 Meanwhile, the exhaust shaft member 212 faces the  
32 exhaust port L and cylinder head D thus preventing

1 air/fuel mixture to leave the cylinder 12 or air to  
2 enter therein.

3

4 As the air/fuel mixture enters the cylinder 12 from  
5 the intake port C, the crankshaft P rotates causing  
6 the piston M to retract, causing the shaft members  
7 210, 212 and hence recesses 214, 216, to rotate in  
8 unison by virtue of them being interconnected by  
9 connecting means to the gearing 114.

10

11 As the piston M begins to extend, the recess 214  
12 rotates to face the cylinder 12 and cylinder head D.  
13 Thus preventing any ingress or leakage of air/fuel  
14 mixture from the cylinder 12 on the compression  
15 stroke, as shown in Fig. 3b.

16

17 Meanwhile, the exhaust shaft member 212 will  
18 likewise have rotated with the recess 216 now facing  
19 the cylinder head D completely. Thus preventing an  
20 ingress of air or an egress of air/fuel mixture.

21

22 On the compression stroke, the crankshaft P rotates  
23 causing the piston M to extend compressing the  
24 air/fuel mixture. The interconnected shaft members  
25 210, 212 and recesses 214, 216 similarly rotate.

26

27 As the piston M becomes fully extended on the  
28 compression stroke, the intake recess 214 at this  
29 point completely faces the cylinder head D and is  
30 thus closed off preventing any egress of compressed  
31 air/fuel mixture, as shown in Fig. 3c.

32

1 A spark plug K (not shown for convenience in Figs.  
2 3a-d), ignites the compressed air/fuel mixture in  
3 the cylinder 12.

4  
5 Alternatively, in a diesel engine, the heat caused  
6 by compressing the air/fuel mixture alone will  
7 result in combustion.

8  
9 The resultant combustion causes the piston M to be  
10 fired to a retracted position causing the crankshaft  
11 P and shaft members 210, 212 to rotate.

12  
13 The intake recess 214 will rotate facing both the  
14 cylinder head D and the intake port C.

15  
16 The exhaust recess 216 will rotate facing the  
17 cylinder 12 and exhaust port L to allow an egress of  
18 combusted gases, as shown in Fig. 3d.

19  
20 The piston M then extends exhausting the combusted  
21 gases out through the recess 216 into the exhaust  
22 port L by virtue of the rotating crankshaft.

23  
24 Meanwhile, rotation of the crankshaft P will cause  
25 the intake recess 214 to rotate and face the inlet  
26 port C and the cylinder 12 to allow the cycle to  
27 begin again.

28  
29 The exhaust recess 216 will likewise rotate facing  
30 the exhaust port L and the cylinder head D, as shown  
31 in Fig. 3a.

32

1 In a third embodiment of the present invention there  
2 is provided apparatus 400, as shown in Figs. 5 and  
3 9, having apparatus 200 as previously described in  
4 the second embodiment, wherein the intake shaft  
5 member 210 and the exhaust shaft member 212 are of  
6 the form of a hollow cylindrical intake shaft member  
7 410 and a hollow cylindrical exhaust shaft member  
8 412.

9  
10 In this way, it should be realised that the heavy  
11 intake manifold (not shown) and outlet manifold 116,  
12 can be replaced by single, less heavy and  
13 complicated manifolds 418, 420, which allow the  
14 ingress of air/fuel mixture and egress of combusted  
15 gases through the hollow shaft members 410, 412.

16  
17 The shaft members 410, 412 are presented to (above)  
18 the cylinder 12 to allow an ingress of air/fuel  
19 mixture thereto through aperture 414, and an egress  
20 of exhaust gases therefrom through aperture 416.

21  
22 In this third embodiment, the air/fuel mixture  
23 passes through the hollow intake shaft member 410  
24 and exits through the aperture 414 into the cylinder  
25 12.

26  
27 After the compression and combustion strokes, the  
28 exhaust gases exit the cylinder 12 through the  
29 aperture 416 and leave via the hollow exhaust shaft  
30 member 412.

31  
32 The shaft members 410, 412 are connected to the



1 crankshaft P by connection means (not shown) coupled  
2 to gearing 114.

3

4 Alternatively, the shaft members 410, 412 may be  
5 coupled to the crankshaft P by a belt.

6

7 It is conceived that rotation of the shaft members  
8 410, 412 although specifically described as being  
9 coupled to and controlled by the crankshaft P, may  
10 be independently and controllably adjustable.

11

12 Furthermore, both shaft members 410, 412 may be  
13 driven independently of the crankshaft P and of each  
14 other.

15

16 In a fourth embodiment of the present invention,  
17 there is provided apparatus 200 wherein the shaft  
18 members 210, 212 are of the form of hollow shaft  
19 members 300, as shown in Figs. 4a and 4b.

20 Each shaft member 300 has an inner hollow  
21 cylindrical tube 310, rotatably mounted within an  
22 outer hollow cylindrical tube 312, also rotatably  
23 mounted.

24

25 The tubes 310, 312 have apertures 314, 316 which  
26 correspondingly serve to allow an ingress of  
27 air/fuel mixture and egress of exhaust gases to pass  
28 therethrough.

29

30 The apertures 314, 316, when appropriately aligned,  
31 form a passage 326.

32

1 The area of the passage 326 is adjusted and  
2 controlled by the speed of rotation of the tubes  
3 310, 312 relative to one another.

4

5 Rotation of the tubes 310, 312 is controlled by  
6 gears 318, 320 located around the circumference of  
7 respective cylindrical buttressed ends 322, 324 of  
8 the tubes 310, 312.

9

10 Rotation of the tubes 310, 312 may be coupled to the  
11 crankshaft P with independently controllable/  
12 adjustable means for varying the speed of rotation  
13 of the tubes 310, 312.

14

15 Alternatively, both tubes 310, 312 may be driven  
16 independently of the crankshaft P and of each other,  
17 with controllable/ adjustable means for varying the  
18 speed of rotation of the tubes 310, 312.

19

20 It will be recognised that the tubes 310, 312 may  
21 also be belt driven or the like, independently of,  
22 or coupled to, the crankshaft P.

23

24 The speed of rotation of the inner tube 310,  
25 relative to the outer tube 312, is such that the  
26 area of the passage 326 maximises or restricts the  
27 rate of ingress or egress of air/fuel mixture or  
28 exhaust gases. In this way, the rotatable shaft  
29 members 300 offer a variable valve timing and  
30 variable valve size.

31

32 With reference to Figs. 4a and 4b, it is to be

1 understood that both tubes 310, 312 do not move  
2 horizontally/longitudinally. The apertures 314, 316  
3 share a common centre-line C/L, and are shown offset  
4 for illustrative purposes only.

5  
6 Common to all embodiments and with regard to sealing  
7 of the various shaft members 110, 210, 212, 310,  
8 312, 410, 412 of the present invention, these will  
9 be as tight a fit as possible cognisant of the  
10 expansion of materials of the individual,  
11 respective, components that will occur once the  
12 engine reaches working temperature.

13  
14 The shaft members 110, 210, 212, 310, 312, 410, 412  
15 include gas tight seals (not shown) incorporated on  
16 the outside faces of bearing races (not shown), of  
17 support bearings (not shown), that will be spaced  
18 along the rotating shaft members 110, 210, 212, 310,  
19 312, 410, 412 between the cylinder 12.

20  
21 Gas tight paddles (not shown) are located within  
22 apertures (not shown) of the shaft members 110, 210,  
23 212, 310, 312, 410, 412, at either side of the  
24 respective recesses and apertures 112, 214, 216,  
25 314, 316, 414, 416, of the axis of rotation.

26  
27 Springs (not shown) are located at the base of the  
28 paddles within the apertures. These serve to force  
29 the paddles outwards towards and against the inside  
30 surfaces of the cylinder head D, within which the  
31 shaft members rotate, so ensuring a gas tight seal  
32 in a similar way to the WANKEL rotary engine.

1 Common to all embodiments, it should be realised  
2 that the shaft members 110, 210, 212, 310, 312, 410,  
3 412 may be of the form of extended or adapted shaft  
4 members 510, 512, rotatably mounted, with a  
5 plurality of recesses or apertures 514, 516  
6 corresponding to the number of cylinders 12, as  
7 shown in Fig. 6.

8  
9 Furthermore, the recesses 112, 214, 216 and  
10 apertures 314, 316, 414, 416 of the corresponding  
11 shaft members 110, 210, 212, 310, 312, 410, 412 can  
12 be as wide as the diameter of the cylinder 12 above  
13 which they sit. This means that a far greater area  
14 will be available for an ingress of air/fuel mixture  
15 or egress of exhausted gases, than might be  
16 associated with conventional valves.

17  
18 The hollow intake shaft members (310, 312,) 410, 510  
19 may form an integral part of an inlet system (not  
20 shown), or may feed into, much simplified, single  
21 branch manifolds 418, at the respective open end of  
22 the shaft members (310, 312), 410, 510 at an end of  
23 the cylinder head D.

24  
25 The hollow exhaust shaft members (310, 312), 412,  
26 512 may form an integral part of an exhaust system  
27 (not shown), or may feed into, much simplified,  
28 single branch manifolds 420, at respective open ends  
29 of the shaft members (310, 312), 412, 512 at an end  
30 of the cylinder head D.

31  
32 In this way, the air/fuel mixture and exhaust gases

1 would not be required to travel via individual  
2 openings within the cylinder head D to individual,  
3 heavy, complicated, and expensive multiple branches  
4 of intake/exhaust manifolds, feeding the  
5 intake/exhaust ports C, L to each cylinder 12.

6  
7 The present invention as described, has a reduced  
8 size compared to a conventional engine 10 and offers  
9 greater flexibility to the location, installation,  
10 and utilisation of internal combustion engines.

11  
12 The simpler design will have favourable implications  
13 as to complexity, overall size of the engine,  
14 efficiency, noise and reliability, finance of raw  
15 materials, manufacturing, etc.

16  
17 For the sake of clarity, it should be understood  
18 that fuel injectors/carburettors, and the spark  
19 plug, have been omitted from Figs. 2a-d and 3a-d but  
20 may be part of the cylinder head assembly.

21  
22 The foregoing description refers to the induction of  
23 air/fuel mixture, as will be the case where a  
24 carburettor or manifold fuel injection is used. It  
25 will be appreciated that the invention may equally  
26 be applied to direct fuel injection engines, in  
27 which case the induction will be of charge air  
28 without fuel.

29  
30 Modifications and improvements may be made to the  
31 above without departing from the scope of the  
32 present invention.

1. CLAIMS

2

3 1. A cylinder head assembly comprising a cylinder  
4 head having an inlet passage and an outlet passage  
5 for communication, in use, with a cylinder, and at  
6 least one rotatably mounted shaft member interposed  
7 between the inlet and outlet passages and the  
8 cylinder, the shaft member(s) having passage means  
9 to allow an ingress of air mixture from the inlet  
10 passage to the cylinder at a first desired  
11 rotational position, and to allow an egress of  
12 combusted gases from the cylinder through the outlet  
13 passage at a second desired rotational position and  
14 to prevent the air or combusted gases from entering  
15 or exiting the cylinder at a third desired  
16 rotational position.

17

18 2. A cylinder head assembly according to claim 1,  
19 in which there are two shaft members, one  
20 cooperating with the inlet passage and one with the  
21 outlet passage.

22

23 3. A cylinder head assembly as claimed in claim 2,  
24 in which the shaft members are coupled, in use, to a  
25 crankshaft with means for independently controlling  
26 or adjusting the speed of rotation of said shaft  
27 members.

28

29 4. A cylinder head assembly as claimed in claim 2,  
30 in which the shaft members are driven independently  
31 of the crankshaft, and of each other, with means for

1 individually controlling or adjusting the speed of  
2 rotation of said shaft members.

3

4 5. A cylinder head assembly according to any  
5 preceding claim, in which the shaft member or each  
6 shaft member is substantially solid.

7

8 6. A cylinder head assembly according to claim 5,  
9 in which the passage means comprises a recess in the  
10 shaft member or a respective recess in each of the  
11 shaft members.

12

13 7. A cylinder head assembly according to claim 2,  
14 in which each shaft member is hollow; each shaft  
15 member having at least one aperture located around a  
16 portion of its circumference, wherein the inlet  
17 shaft member allows an ingress of air/fuel mixture  
18 from the inlet shaft member to enter said cylinder  
19 when the aperture in the inlet shaft is presented to  
20 the cylinder, and the outlet shaft member allows an  
21 egress of combusted gases to exit the cylinder when  
22 the aperture in the outlet shaft member is presented  
23 to the cylinder.

24

25 8. A cylinder head assembly according to claim 7,  
26 in which each shaft member is provided with an inner  
27 hollow tube member rotatably mounted within said  
28 shaft member; each inner tube member having at least  
29 one aperture located around a portion of its  
30 circumference; rotation of said inner tube member  
31 within the respective hollow shaft members providing  
32 a variable size effective aperture, which allows a

1 variable ingress of combustion air to enter said  
2 cylinder through the effective aperture in the inlet  
3 shaft member, and allows a variable egress of  
4 combusted gases from the cylinder to exit through  
5 the effective aperture in the outlet shaft member.  
6

7 9. A cylinder head assembly according to claim 8,  
8 in which the speed of rotation of the inner and  
9 outer tube members are such that the effective  
10 aperture maximises or restricts the rate of ingress  
11 of air, or egress of exhaust gases, through the  
12 respective inner tube members.  
13

14 10. A cylinder head assembly as claimed in claim 8  
15 or claim 9, in which the inner tube members are  
16 coupled, in use, to a crankshaft with means for  
17 independently controlling or adjusting the speed of  
18 rotation of said tube members.  
19

20 11. A cylinder head assembly as claimed in claim 8  
21 or claim 9, in which the tube members are driven  
22 independently of the crankshaft, and of each other,  
23 with means for individually controlling or adjusting  
24 the speed of rotation of said tube members.  
25

26 12. A cylinder head assembly according to any  
27 preceding claim, in which the shaft member(s) extend  
28 over a number of cylinders, the shaft member(s)  
29 having a corresponding number of passage means.  
30



- 1 13. A cylinder head assembly according to any  
2 preceding claim, in which the shaft member(s) have  
3 gas tight seal assemblies.  
4
- 5 14. A method of allowing an ingress and egress of  
6 combustion air and combusted gases from a cylinder  
7 comprising the steps of:  
8       presenting a passage means within a shaft  
9 member to an inlet passage;  
10       retracting of a piston within a cylinder to  
11 allow an induction of air from the inlet passage  
12 through said passage means into the cylinder;  
13       rotating the shaft member to prevent any  
14 leakage of air upon a compression of the air in the  
15 cylinder by the piston;  
16       combusting air/fuel mixture in the cylinder to  
17 cause said piston to retract;  
18       extending the piston in the cylinder;  
19       presenting passage means to the cylinder and  
20 an outlet passage to allow an egress of combusted  
21 gases; and  
22       repeating the above steps.  
23
- 24 15. A method according to claim 14, in which the  
25 same passage means is used for induction and egress.  
26
- 27 16. A method according to claim 14, in which the  
28 passage means is formed by an aperture in at least  
29 one hollow shaft, and the method further includes  
30 the step of varying the effective size of the  
31 aperture to restrict or maximise the amount of fluid  
32 flow through the aperture.

1

2

3     ABSTRACT     (Fig. 2)

4

5     Improvements in or Relating to Internal Combustion  
6     Engines

7

8     Cylinder head apparatus (100) for an internal  
9     combustion engine having a cylinder (F) and piston  
10    (M) comprises a rotating shaft (110) having a recess  
11    (112) causing periodic communication between the  
12    cylinder (F) and intake (C) and exhaust (L)  
13    passages. In other embodiments, two shafts are  
14    used, and hollow shafts with apertures are used.

1/6

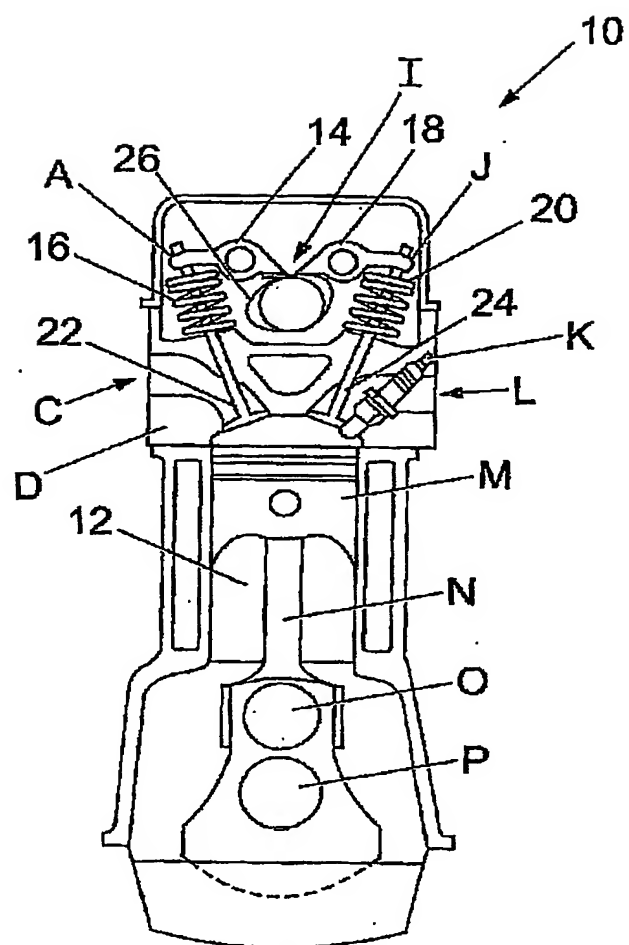


Fig. 1

2 / 6

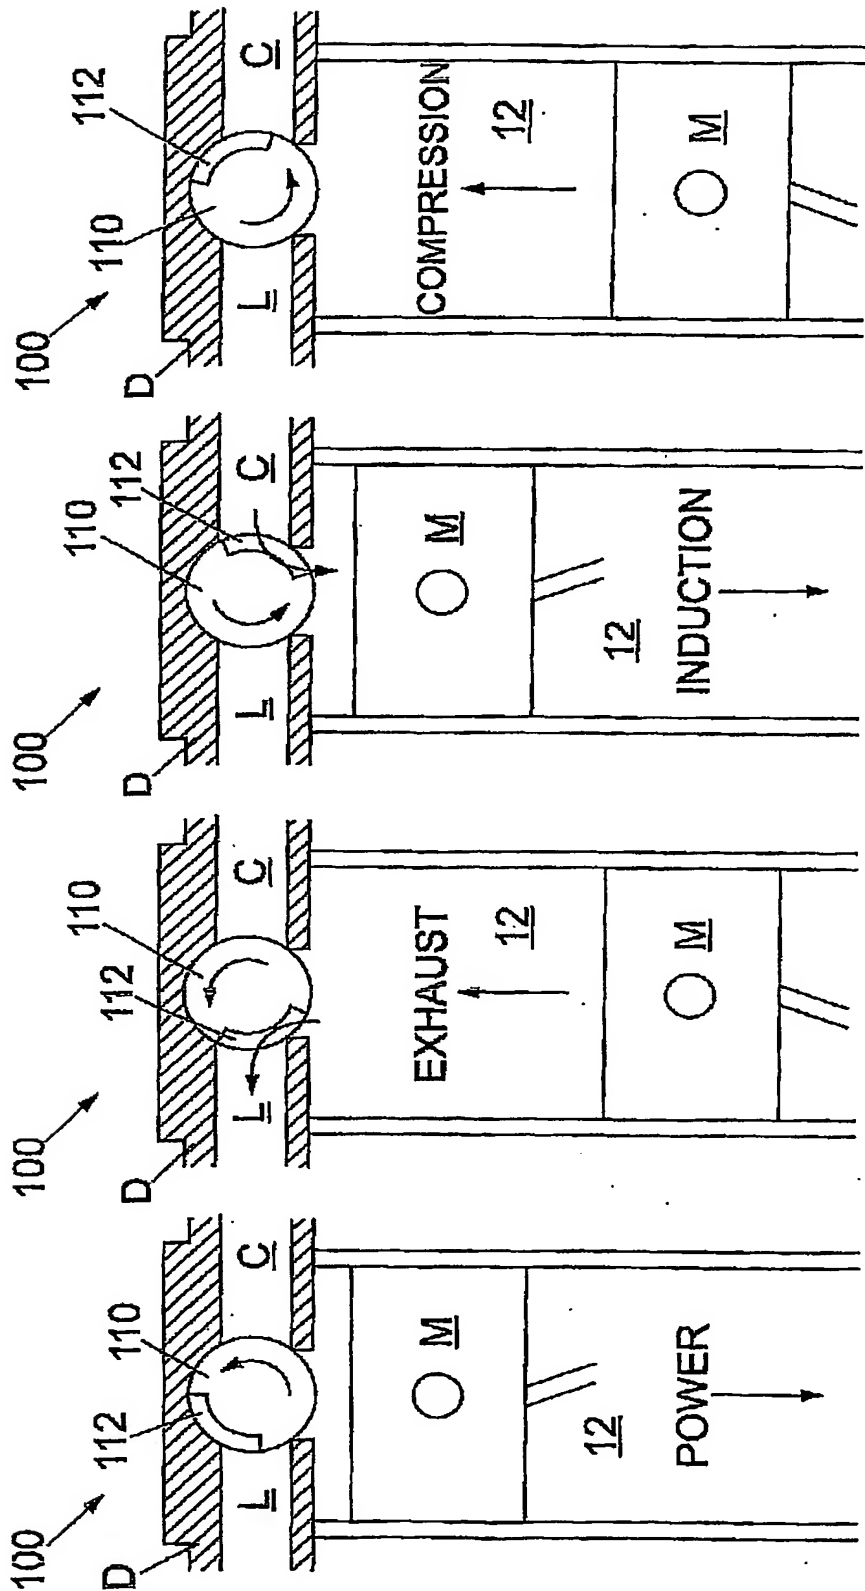


Fig. 2b

Fig. 2a

Fig. 2d

Fig. 2c

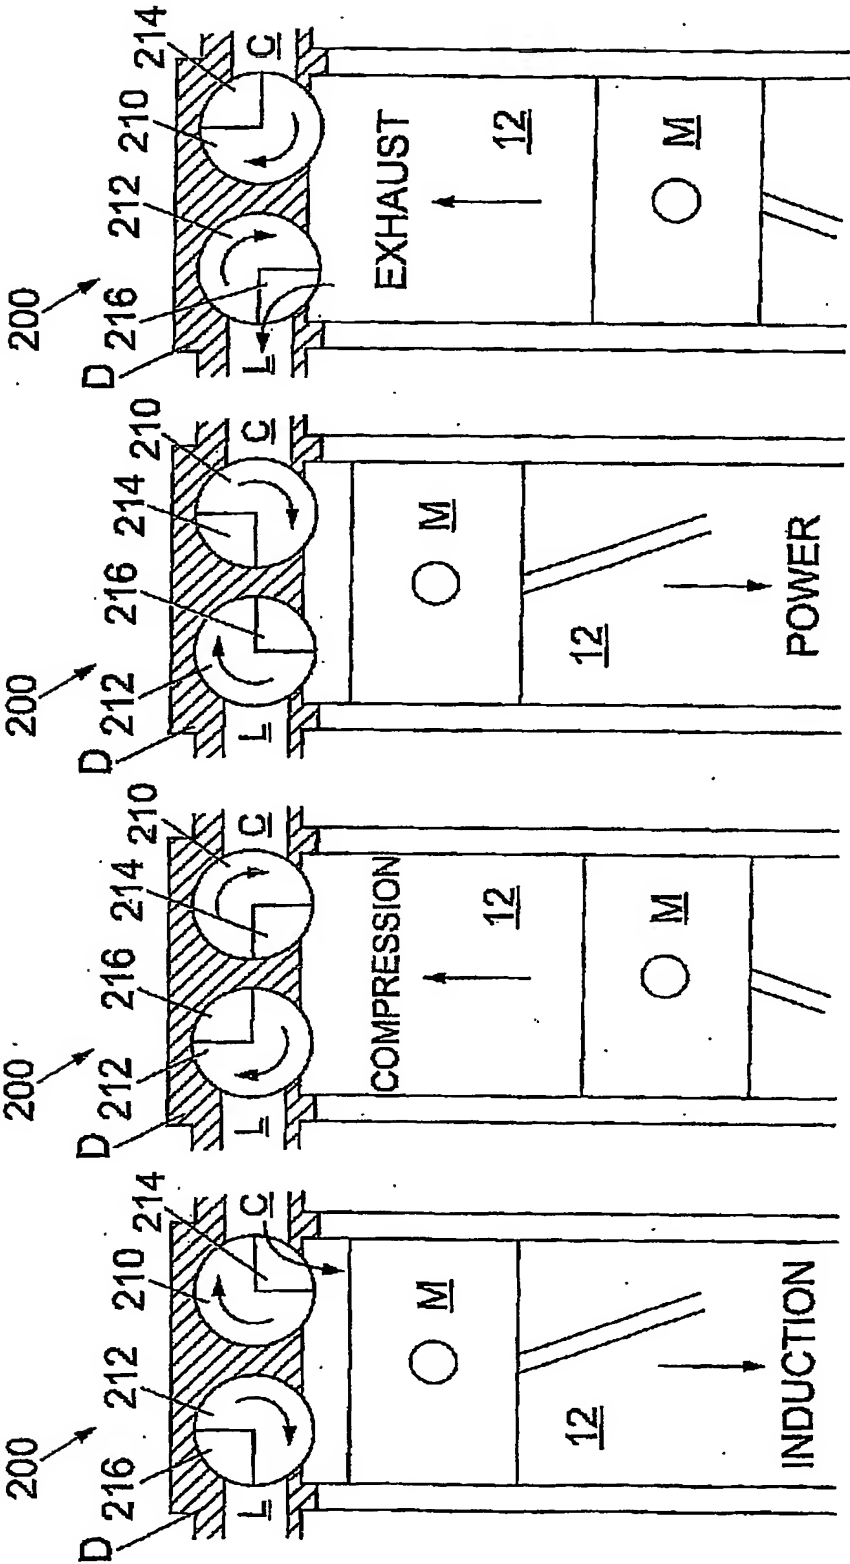




Fig. 3d

Fig. 3c



Fig. 3b

Fig. 3a.

4 / 6

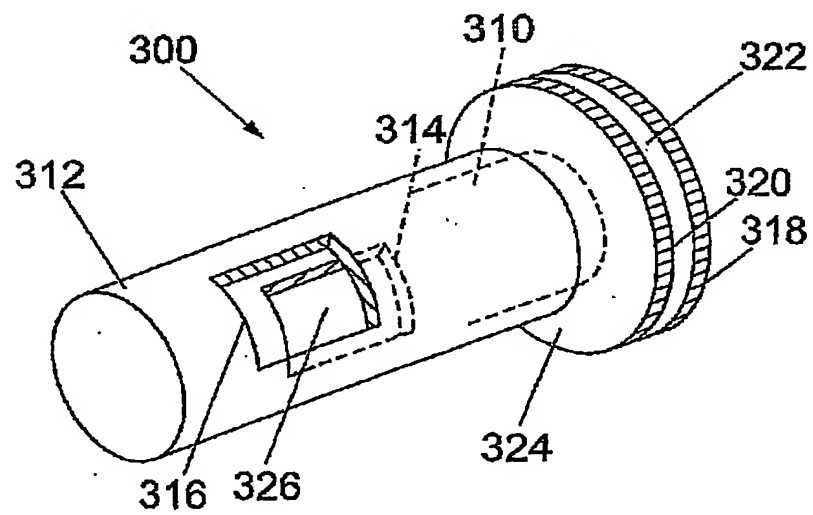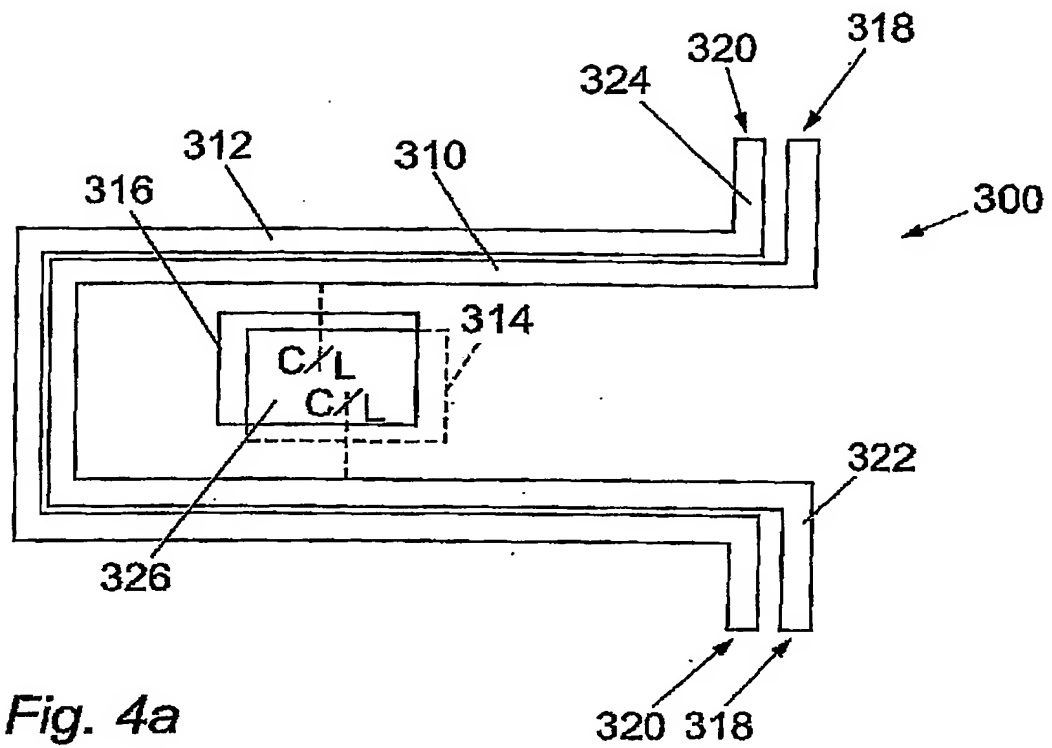

5 / 6

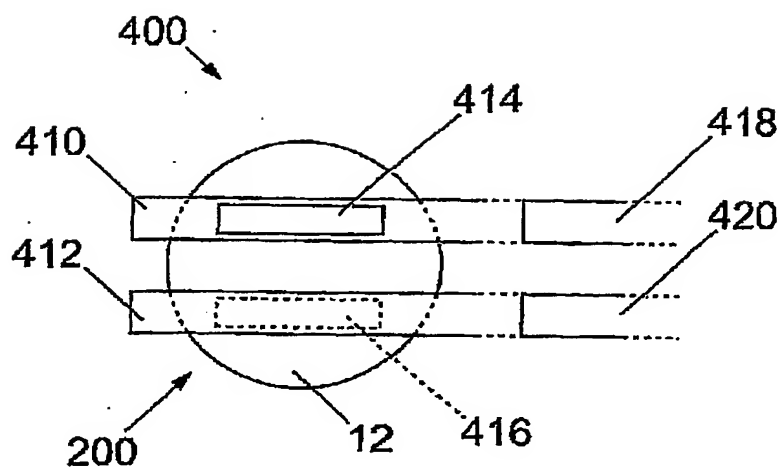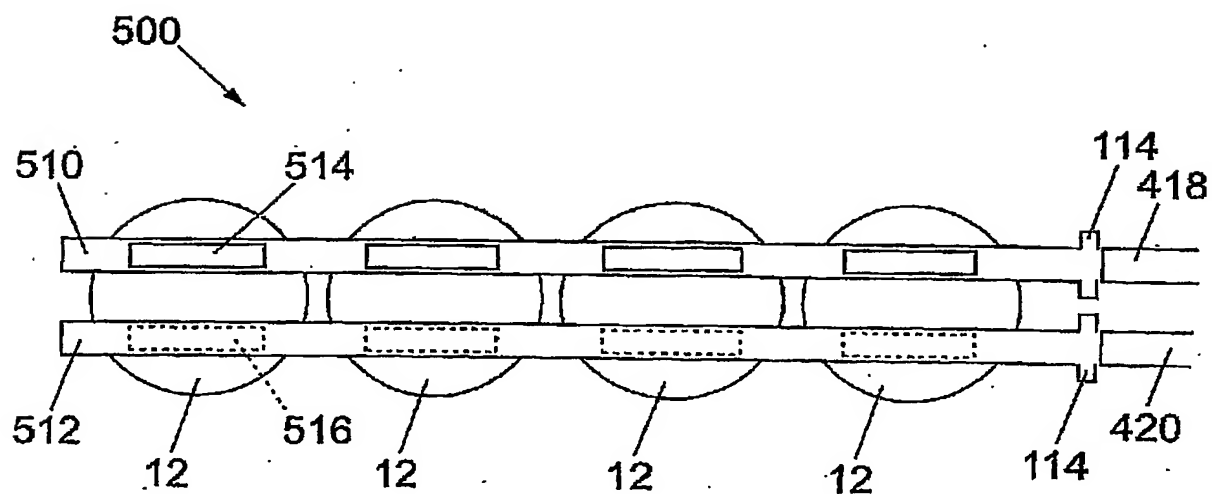*Fig. 5**Fig. 6*

6 / 6

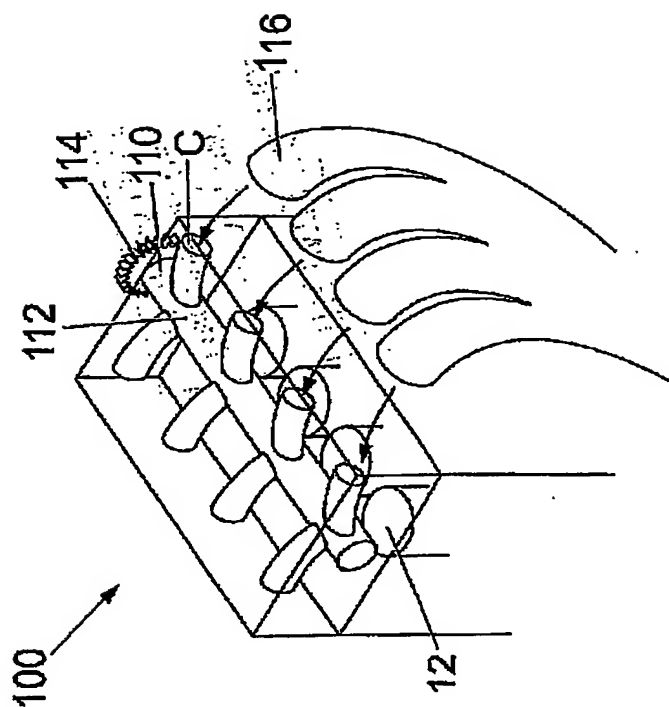


Fig. 7

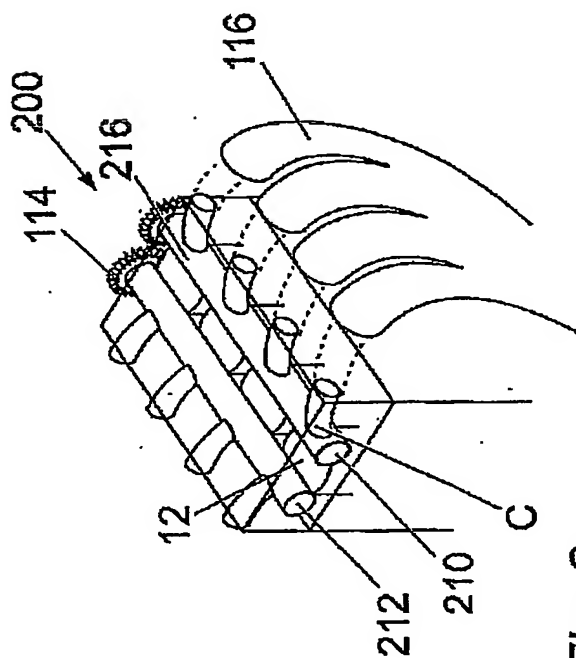


Fig. 8

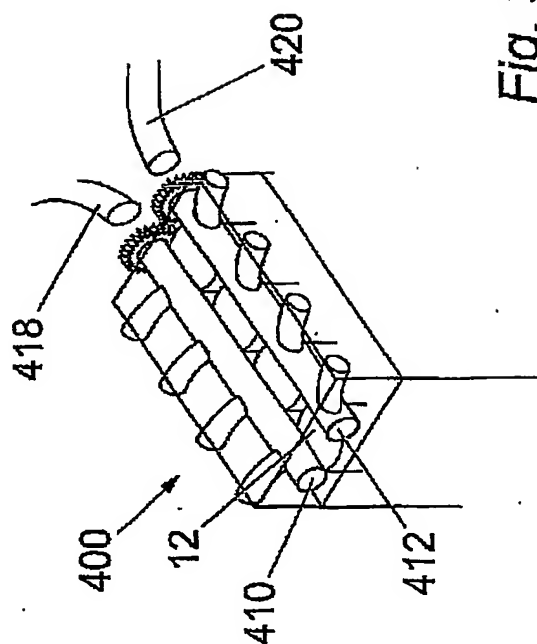


Fig. 9



# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 03/03517

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F01L7/02 F01L7/16 F01L1/34 F01L1/352 F01L1/356

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 00 71858 A (GRIMWOOD JOHN FRANCIS) 30 November 2000 (2000-11-30) the whole document	1-3,5,6, 12-14 4
X	GB 284 941 A (CHARLES LUYCKX) 9 February 1928 (1928-02-09)  the whole document	1,2,7,8, 11,12, 14,16
X	DE 100 59 269 A (FELGER ANDREAS) 6 June 2002 (2002-06-06) the whole document	1-4,7, 12,14
X,P	US 2002/139342 A1 (TRENTHAM O PAUL) 3 October 2002 (2002-10-03) the whole document	1,2,5-8, 12-14,16

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*8\* document member of the same patent family

Date of the actual completion of the international search

28 November 2003

Date of mailing of the International search report

11/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Klinger, T

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB 03/03517

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0071858	A	30-11-2000	AU 5257800 A WO 0071858 A2	12-12-2000 30-11-2000
GB 284941	A	09-02-1928	NONE	
DE 10059269	A	06-06-2002	DE 10059269 A1	06-06-2002
US 2002139342	A1	03-10-2002	WO 02079613 A2 US 2003106517 A1	10-10-2002 12-06-2003